

Content Server

Version: 7.0

Installing Content Server with IBM WebSphere Application Server

Document Revision Date: Mar. 26, 2007



FATWIRE CORPORATION PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. In no event shall FatWire be liable for any loss of profits, loss of business, loss of use of data, interruption of business, or for indirect, special, incidental, or consequential damages of any kind, even if FatWire has been advised of the possibility of such damages arising from this publication. FatWire may revise this publication from time to time without notice. Some states or jurisdictions do not allow disclaimer of express or implied warranties in certain transactions; therefore, this statement may not apply to you.

Copyright © 2007 FatWire Corporation. All rights reserved.

This product may be covered under one or more of the following U.S. patents: 4477698, 4540855, 4720853, 4742538, 4742539, 4782510, 4797911, 4894857, 5070525, RE36416, 5309505, 5511112, 5581602, 5594791, 5675637, 5708780, 5715314, 5724424, 5812776, 5828731, 5909492, 5924090, 5963635, 6012071, 6049785, 6055522, 6118763, 6195649, 6199051, 6205437, 6212634, 6279112 and 6314089. Additional patents pending.

FatWire, Content Server, Content Server Bridge Enterprise, Content Server Bridge XML, Content Server COM Interfaces, Content Server Desktop, Content Server Direct, Content Server Direct Advantage, Content Server DocLink, Content Server Engage, Content Server InSite Editor, Content Server Satellite, and Transact are trademarks or registered trademarks of FatWire, Inc. in the United States and other countries.

iPlanet, Java, J2EE, Solaris, Sun, and other Sun products referenced herein are trademarks or registered trademarks of Sun Microsystems, Inc. *AIX, IBM, WebSphere*, and other IBM products referenced herein are trademarks or registered trademarks of IBM Corporation. *WebLogic* is a registered trademark of BEA Systems, Inc. *Microsoft, Windows* and other Microsoft products referenced herein are trademarks or registered trademarks of Microsoft Corporation. *UNIX* is a registered trademark of The Open Group. Any other trademarks and product names used herein may be the trademarks of their respective owners.

This product includes software developed by the Apache Software Foundation (<http://www.apache.org/>) and software developed by Sun Microsystems, Inc. This product contains encryption technology from Phaos Technology Corporation.

You may not download or otherwise export or reexport this Program, its Documentation, or any underlying information or technology except in full compliance with all United States and other applicable laws and regulations, including without limitation the United States Export Administration Act, the Trading with the Enemy Act, the International Emergency Economic Powers Act and any regulations thereunder. Any transfer of technical data outside the United States by any means, including the Internet, is an export control requirement under U.S. law. In particular, but without limitation, none of the Program, its Documentation, or underlying information of technology may be downloaded or otherwise exported or reexported (i) into (or to a national or resident, wherever located, of) Cuba, Libya, North Korea, Iran, Iraq, Sudan, Syria, or any other country to which the U.S. prohibits exports of goods or technical data; or (ii) to anyone on the U.S. Treasury Department's Specially Designated Nationals List or the Table of Denial Orders issued by the Department of Commerce. By downloading or using the Program or its Documentation, you are agreeing to the foregoing and you are representing and warranting that you are not located in, under the control of, or a national or resident of any such country or on any such list or table. In addition, if the Program or Documentation is identified as Domestic Only or Not-for-Export (for example, on the box, media, in the installation process, during the download process, or in the Documentation), then except for export to Canada for use in Canada by Canadian citizens, the Program, Documentation, and any underlying information or technology may not be exported outside the United States or to any foreign entity or "foreign person" as defined by U.S. Government regulations, including without limitation, anyone who is not a citizen, national, or lawful permanent resident of the United States. By using this Program and Documentation, you are agreeing to the foregoing and you are representing and warranting that you are not a "foreign person" or under the control of a "foreign person."

Installing Content Server with IBM WebSphere Application Server

Document Revision Date: Mar. 26, 2007

Product Version: Content Server

FatWire Technical Support

www.fatwire.com/Support

FatWire Headquarters

FatWire Corporation
330 Old Country Road
Suite 207
Mineola, NY 11501
www.fatwire.com

Table of Contents

1 Introduction	5
About This Guide	6
How This Guide Is Organized	6
Graphics in This Guide	6
Acronyms and Variables	6
Paths and Directories	7
Installation Quick Reference	7

Part 1. Database

2 Setting Up a Database	13
--------------------------------	-----------

Part 2. Application Server

3 Installing and Configuring WebSphere Application Server	17
Start/Stop Commands	18
Deployment Manager	18
Node Agent	18
Application Server	19
Installing WebSphere Application Server	20
A. Installing WebSphere Application Server	20
B. Installing the Update Installer	23
C. Updating the WAS Installation Using the Update Installer	25
D. Modifying the WAS Start Script	27
Creating a WAS Instance	28
Creating a WAS Instance Using the Profile Management Tool	28
Creating a WAS Instance Using the Command Line	35

Configuring the WAS Instance for Database Communications	37
A. Creating a J2C Authentication	37
B. Creating a JDBC Provider	41
C. Creating a JDBC Data Source	46
Deploying the Content Server Application	52
Restarting the Content Server Application	63

Part 3. Web Server

4 Setting Up a Web Server	67
Installing IBM HTTP Server	68
Installing the Apache 2.0.x Web Server	74
Integrating WAS with a Supported Web Server	74

Part 4. Content Server

5 Installing and Configuring Content Server	85
Installing Content Server	86
Running the Installer	86
Post-Installation Steps	87
A. Setting File Permissions (Unix Only)	87
B. Verifying the Installation	87
C. Setting Up a Content Server Cluster (Optional)	92
D. Setting Up Content Server for Its Business Purpose	93

Chapter 1

Introduction

This document provides guidelines for installing Content Server on IBM WebSphere Application Server 6.1 Network Deployment, connecting to the supported database of your choice.

Note

Anyone using this guide is expected to have experience installing and configuring databases, web servers, and application servers. Selected information regarding the configuration of third-party products is given in this guide. For detailed information about a particular third-party product, refer to that product's documentation.

This chapter provides information that will help you prepare for the Content Server installation. It contains the following sections:

- [About This Guide](#)
- [Installation Quick Reference](#)

About This Guide

This guide covers the installation, configuration, and maintenance of IBM WebSphere Application Server 6.1 Network Deployment (referred to throughout this guide as WebSphere Application Server and WAS), as required to support Content Server. This includes configuration of one or more WAS instances, backend databases, and integrating WAS with IBM HTTP Server and the Apache web server. Instructions on creating a vertical Content Server cluster are also provided.

How This Guide Is Organized

The content of this guide is organized by function rather than the order in which installation steps are completed. For example, a function such as application deployment is associated with the application server. It is presented in Part II (which covers the application server), even though it is performed, later, when Content Server is installed (Part IV). Each major component of the Content Server installation is covered in its own part. A summary of the installation steps in the required order is given at the end of this chapter (see “[Installation Quick Reference](#),” on page 7).

Graphics in This Guide

Many steps in this guide include screen captures of dialog boxes and similar windows that you interact with in order to complete the steps. The screen captures are presented to help you follow the installation process. They are not intended to be sources of specific information, such as parameter values, options to select, or product version number.

Acronyms and Variables

This guide uses the following acronyms and variables:

Name used by guide	Description
WAS	WebSphere Application Server
DM	Deployment Manager
CS	Content Server
<DM_host>	The host name or IP address of the Deployment Manager host.
<DM_console_port>	The port number on which the Deployment Manager console is listening for connections.
<DM_profile>	The name of the Deployment Manager profile.
<DM_SOAP_port>	The number of the Simple Object Access Protocol port of the Deployment Manager.
<WAS_host>	The host name of the machine running WAS.

Name used by guide	Description
<server_name>	The name of the WAS server.
<appserv_profile>	The name of the application server profile.
<appserv_cell>	The name of the application server cell.
<appserv_node>	The name of the application server node.

Paths and Directories

This guide uses the following paths and directories:

Name used by guide	Description
<WAS_home>	Path to the directory where WAS is installed. The path includes the name of the directory.
<cs_install_dir>	Path to the directory where Content Server is installed. The path includes the name of the directory.
<cs_shared_dir>	Path to the Content Server shared file system directory. The path includes the name of the shared directory.
<apache_home>	Path to the directory where the Apache web server is installed. The path includes the name of the directory.
<ibm_http_home>	Path to the directory where IBM HTTP Server is installed. The path includes the name of the directory.
<plugin_root>	The path to the plug-in directory of the web server. The path includes the name of the directory.

Installation Quick Reference

After you install and configure the J2EE components that support Content Server, you will run the Content Server installer, which will guide you through the installation process. You will run the installer on each development, delivery, and management system on which you plan to use Content Server. During the Content Server installation, you will have the option to install sample sites and sample content.

Note

The names of the systems in your Content Server environment might differ from the names used in this document. Typically, the management system is also called “staging,” and the delivery system is also called “production.”

The steps below summarize the installation and configuration of Content Server and its supporting software. Keep the steps handy as a quick reference to installation procedures and to chapters that provide detailed instructions.

To install Content Server and its supporting software

Complete the steps below for each development, content management, and production environment.

I. Set Up the Database

Set up your choice of supported databases by installing the database management system, creating a database for Content Server, and configuring the database. For instructions, see our guide *Configuring Third-Party Software*.

II. Set Up the Application Server

Install and configure WebSphere Application Server by following the steps described in [Chapter 3, “Installing and Configuring WebSphere Application Server,”](#) and summarized below:

1. Install the WebSphere Application Server software, update your installation to the latest version, and modify the WAS start script by following the steps in [“Installing WebSphere Application Server,” on page 20](#).
2. Create a WAS instance on which you will install Content Server by following the steps in [“Creating a WAS Instance,” on page 28](#).

If you are creating a Content Server cluster, create a unique WAS instance for each member of the cluster.
3. Configure the WAS instance for database communications, as shown in [“Configuring the WAS Instance for Database Communications,” on page 37](#). This step requires you to:
 - a. Create a J2C authentication. For instructions, see [“Creating a J2C Authentication,” on page 37](#).
 - b. Create a JDBC provider. For instructions, see [“Creating a JDBC Provider,” on page 41](#).
 - c. Create a JDBC data source. For instructions, see [“Creating a JDBC Data Source,” on page 46](#).

If you are creating a Content Server cluster, perform [steps b](#) and [c](#) for each member of the cluster. Cluster members can share the same J2C authentication.

III. (Optional) Set Up the Web Server

If you plan to integrate WAS with IBM HTTP Server or the Apache web server, follow instructions in [Chapter 4, “Setting Up a Web Server.”](#)

IV. Install and Configure Content Server

1. Before you run the installer, make sure that:
 - You have created the directory into which you are installing Content Server. The directory name and path cannot contain spaces and the application server must be able to read from and write to that directory.

- For clustered installations, you have created a shared file system directory that all cluster members can read from and write to; the directory name and path cannot contain spaces. Note the following:
 - For delivery systems, the default location of the shared file system directory is the directory containing the directory in which Content Server is installed.
 - For content management and development systems, the default location of the shared file system directory is inside the directory in which Content Server is installed.
 - Your system is capable of displaying the CS installer GUI. The installer will not work in text mode.
2. Install Content Server by running the supplied installer. The installer provides online help at each screen, should you need guidance. For more information, see [Chapter 5, “Installing and Configuring Content Server.”](#)
- Half-way through the installation, the installer will display the “Install Actions” pop-up window. When this window appears, you will have to deploy the CS application. For instructions, see [“Deploying the Content Server Application,” on page 52.](#)
- If you are using an Oracle database and will require text attributes greater than 2000 characters, you will have to set the `cc.bigtext` property to CLOB after the CS application is deployed. For instructions, see [step 5 in “Running the Installer,” on page 86.](#)
3. Complete the Content Server installation by performing the following steps:
- a. If you installed Content Server on Unix, set the permissions for Content Server binaries by following the steps in [“Setting File Permissions \(Unix Only\),” on page 87.](#)
 - b. Verify the Content Server installation by logging in as the administrator. For instructions, see [“Verifying the Installation,” on page 87.](#)
 - c. If you are creating a vertically clustered system, follow instructions in [“Setting Up a Content Server Cluster \(Optional\),” on page 92.](#)
 - d. Once the entire installation is completed and verified, set up Content Server for its business purpose. For instructions, see the *Content Server Administrator’s Guide* and the *Content Server Developer’s Guide*.

Part 1

Database

This part contains a short chapter summarizing the databases that Content Server uses. Instructions on creating and configuring the databases are given in our guide, *Configuring Third-Party Software*.

This part contains the following chapter:

- [Chapter 2, “Setting Up a Database”](#)

Chapter 2

Setting Up a Database

Content Server requires access to a database that is specifically configured for Content Server. The list of supported databases (as well as other third-party components) is given in the *Supported Platform Document*, accessible from:

<http://e-docs.fatwire.com/CS>

(Click the Content Server version number, and on the Content Server page, click the **Supported Platform Document** link.)

Before installing any other of Content Server's supporting software, you must complete the following steps:

1. Install the database management system.
For instructions, refer to the product vendor's documentation.
2. Create and configure a database for Content Server.
For instructions, consult our guide *Configuring Third-Party Software*. Note that database configuration is identical across different application servers. Refer to the correct chapter to create and configure the database of your choice.

Part 2

Application Server

This part contains information about installing and configuring WebSphere Application Server to support Content Server.

This part contains the following chapter:

- [Chapter 3, “Installing and Configuring WebSphere Application Server”](#)

Chapter 3

Installing and Configuring WebSphere Application Server

The chapter shows you how to install and configure WebSphere Application Server for Content Server.

This is not an exhaustive chapter, as it covers the installation of WAS only so far as needed to install and run Content Server. For more details, see the WAS documentation.

This chapter contains the following sections:

- [Start/Stop Commands](#)
- [Installing WebSphere Application Server](#)
- [Creating a WAS Instance](#)
- [Configuring the WAS Instance for Database Communications](#)
- [Deploying the Content Server Application](#)
- [Restarting the Content Server Application](#)

Start/Stop Commands

This section lists the commands for starting and stopping WAS components.

Deployment Manager

Note

The default Deployment Manager profile name is Dmgr01.

To start:

- On Windows:
`<WAS_home>\bin\startManager.bat -profileName <DM_profile>`
- On Unix:
`<WAS_home>/bin/startManager.sh -profileName <DM_profile>`

To stop:

- On Windows:
`<WAS_home>\bin\stopManager.bat -profileName <DM_profile>`
- On Unix:
`<WAS_home>/bin/stopManager.sh -profileName <DM_profile>`

Node Agent

Note

The default name of the first application server profile created is AppSrv01.

To start:

- On Windows:
`<WAS_home>\bin\startNode.bat -profileName <appserv_profile>`
- On Unix:
`<WAS_home>/bin/startNode.sh -profileName <appserv_profile>`

To stop:

- On Windows:
`<WAS_home>\bin\stopNode.bat -profileName <appserv_profile>`
- On Unix:
`<WAS_home>/bin/stopNode.sh -profileName <appserv_profile>`

Application Server

Note

The default server name is `server1`.

The default name of the first application server profile created is `AppSrv01`.

To start:

- On Windows:
`<WAS_home>\bin\startServer.bat <server_name> -profileName <appserv_profile>`
- On Unix:
`<WAS_home>/bin/startServer.sh <server_name> -profileName <appserv_profile>`

To stop:

- On Windows:
`<WAS_home>\bin\stopServer.bat <server_name> -profileName <appserv_profile>`
- On Unix:
`<WAS_home>/bin/stopServer.sh <server_name> -profileName <appserv_profile>`

Installing WebSphere Application Server

This section describes how to install WebSphere Application Server. It contains the following steps:

- A. Installing WebSphere Application Server
- B. Installing the Update Installer
- C. Updating the WAS Installation Using the Update Installer

A. Installing WebSphere Application Server

To install WebSphere Application Server

1. Create the directory where WAS will be installed. Make sure the WAS installer can read from and write to this directory.

Note


Throughout this guide, the directory where WAS is installed is referred to as <WAS_home>.

2. Decompress the WAS installation package into a temporary directory.
3. Run the WAS installer located in the `was` subdirectory:
 - On Windows: `<temp_dir>\was\install.exe`
 - On Unix: `<temp_dir>/was/install.sh`


Note

If you are installing on Unix, make sure the `DISPLAY` variable is set.


4. In the “Welcome” screen, click **Next**.

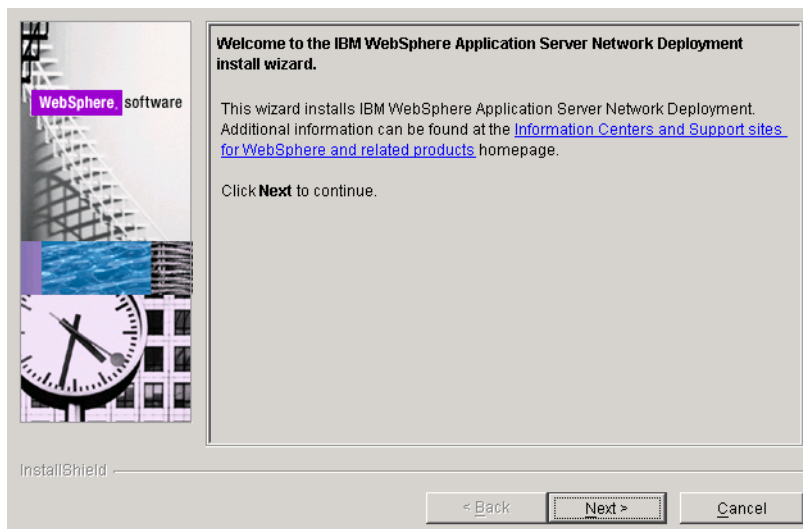


5. In the “Software License Agreement” screen, select **I accept both the IBM and the non-IBM terms** and click **Next**.

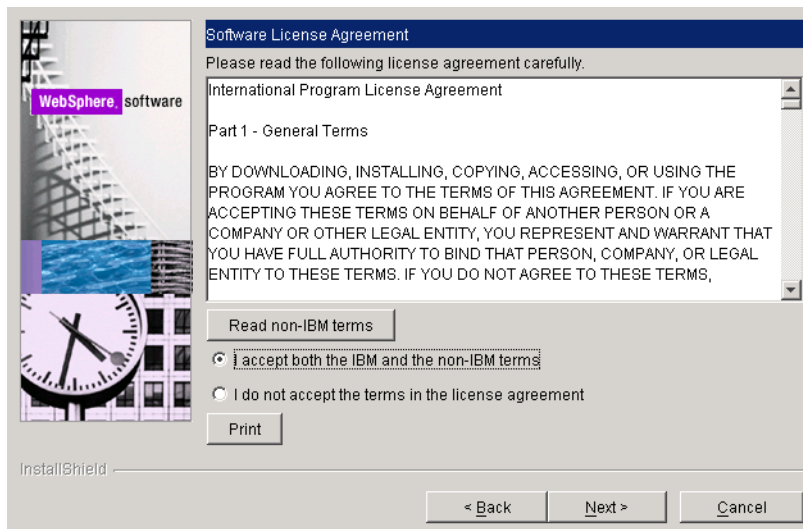

6. In the “Install Sample Application” screen, click **Next**.
7. In the “Installation Directory” screen, browse to the <WAS_home> directory you created in [step 1](#) and click **Next**.

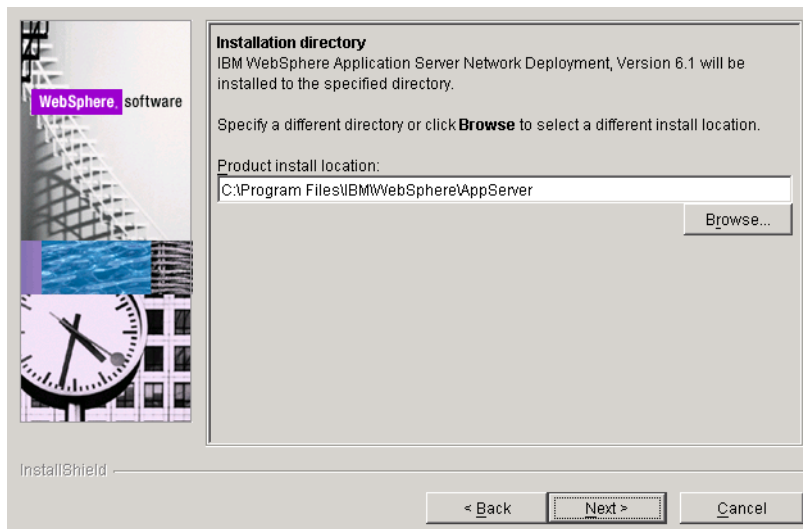


8. In the “WebSphere Application Server environments” screen, select **Deployment manager** and click **Next**.

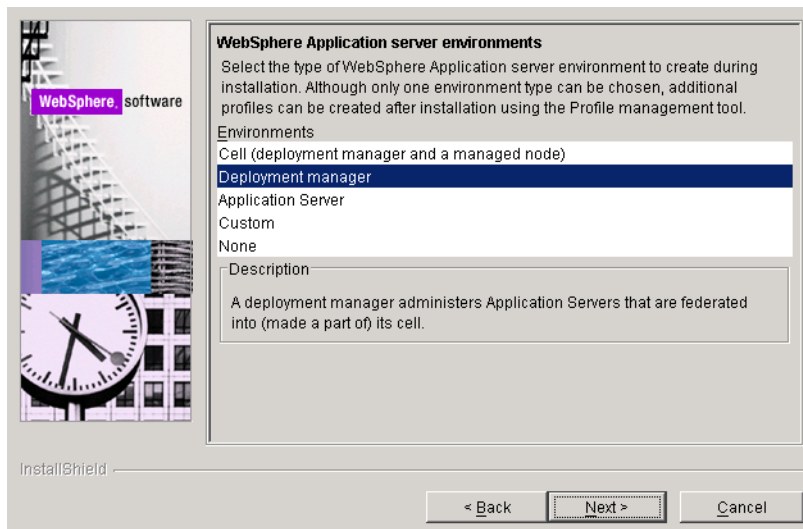

9. In the “Enable Administrative Security” screen, do one of the following:
- If you wish to enable administrative security, select the **Enable administrative security** check box and enter a user name and password. (Re-enter the password for verification.)
 - If you do not wish to enable administrative security, leave the **Enable administrative security** check box deselected and click **Next**.

For more information on the administrative security option, consult the WebSphere documentation.

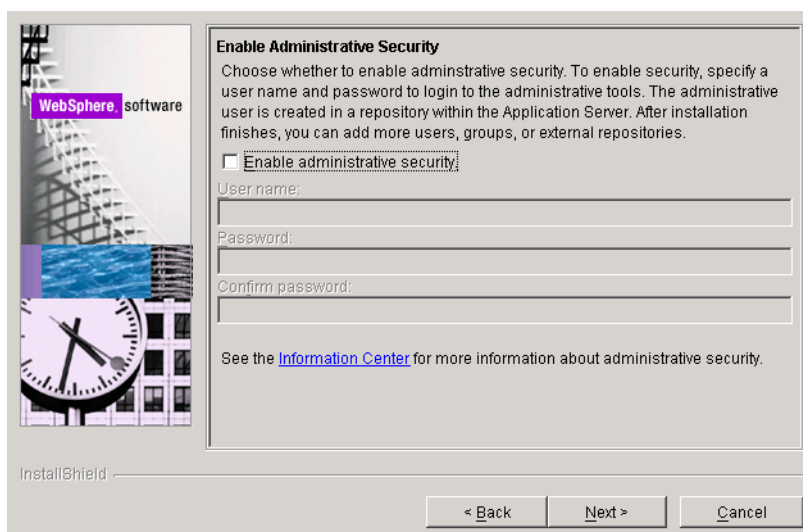


10. In the “Installation Summary” screen, click **Next**.
11. When the installation completes successfully, click **Finish**.

B. Installing the Update Installer


In order to ensure your WAS installation has the latest patches and fixes, you must update it using the IBM Update Installer. This section explains how to install the Update Installer. The next section explains how to update your WAS installation using the Update Installer.

To install the IBM Update Installer

1. Decompress the Update Installer archive into a temporary directory.
2. Start the installation process by executing the following command:
 - On Windows:
`<temp_dir>\UpdateInstaller\install.exe`
 - On Unix:
`<temp_dir>/UpdateInstaller/install.sh`
3. In the “Installation Wizard for the Update Installer” screen, click **Next**.

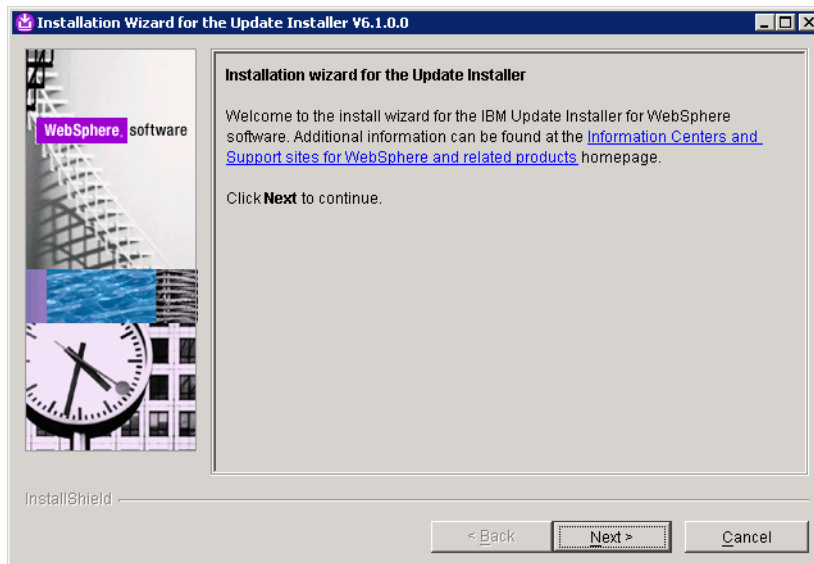


4. In the “Software License Agreement” screen, select **I accept both the IBM and the non-IBM terms** and click **Next**.

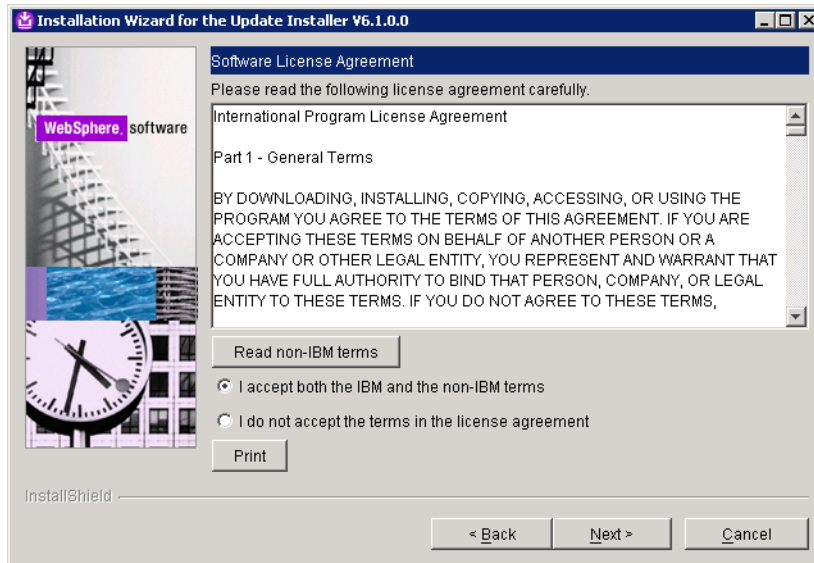

5. In the “System prerequisites check” screen, do one of the following:
 - If the system prerequisites check is successful, click **Next**.
 - If the system prerequisites check reports that your JDK version is incorrect, stop and restart the installation. The installer will update your JDK to the latest version and restart.

When the installer restarts, go back to [step 3](#) of this procedure.

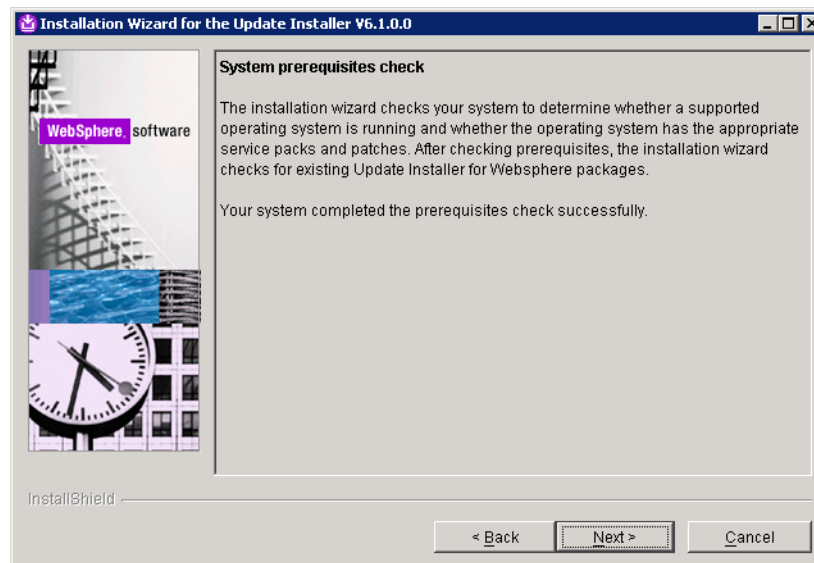


6. In the “Installation directory” screen, specify the directory in which you want to install the Update Installer. This directory must reside inside the <WAS_home> directory.

For example:

<WAS_home>/UpdateInstaller

When you are finished, click **Next**.

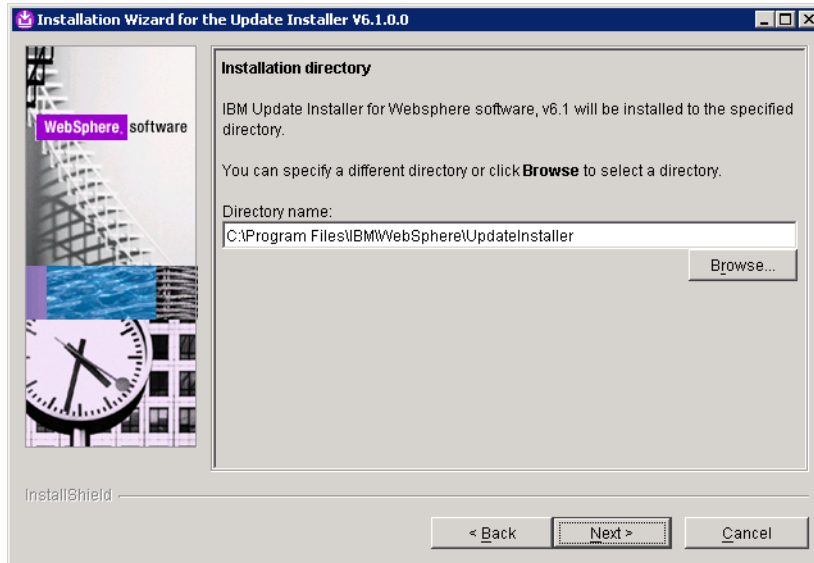

7. In the “Installation Summary” screen, click **Next**.
8. When the installation completes successfully, click **Finish**.

C. Updating the WAS Installation Using the Update Installer

After installing the Update Installer, you must run it to update your WAS installation to the latest version.

Note

Before running the Update Installer, obtain the latest WAS maintenance package (.pak file). Maintenance packages are available from the IBM support site.


To update the WAS installation to the latest version

1. Run the Update Installer:
 - On Windows:



```
<WAS_home>\<update_installer_dir>\update.bat
```
 - On Unix:


```
<WAS_home>/<update_installer_dir>/update.sh
```
2. In the “Before Installing” screen, click **Next**.


3. In the “Product selection” screen, browse to the <WAS_home> directory and click **Next**.

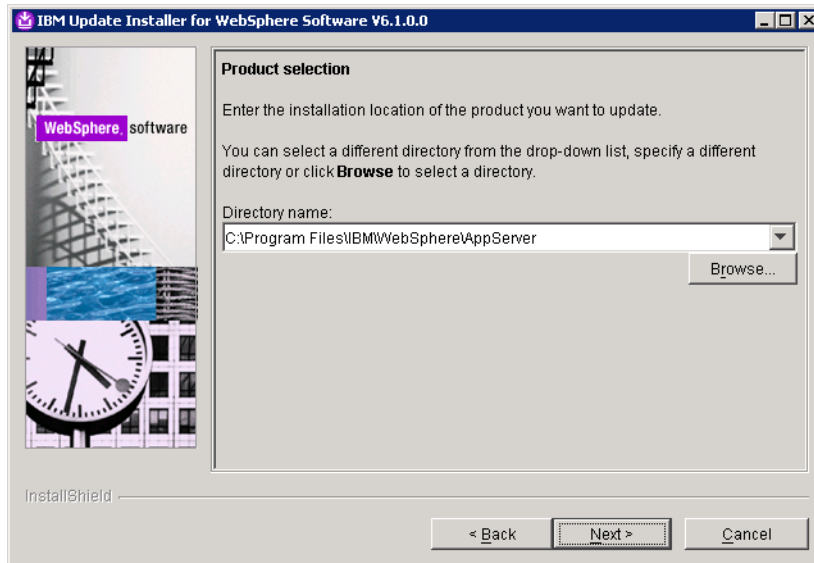

4. In the “Select the maintenance operation” screen, select **Install maintenance package** and click **Next**.

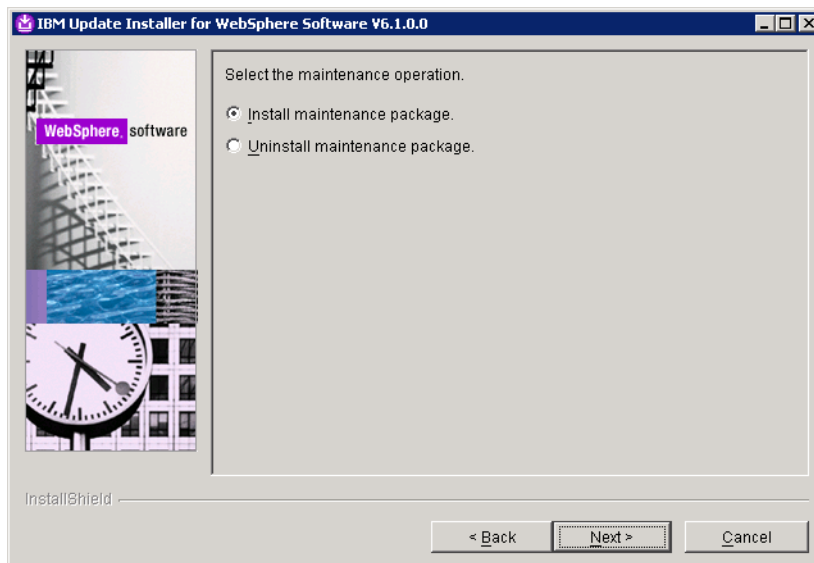

5. In the “Maintenance package selection” screen, browse to the appropriate maintenance package (.pak file) and click **Next**.

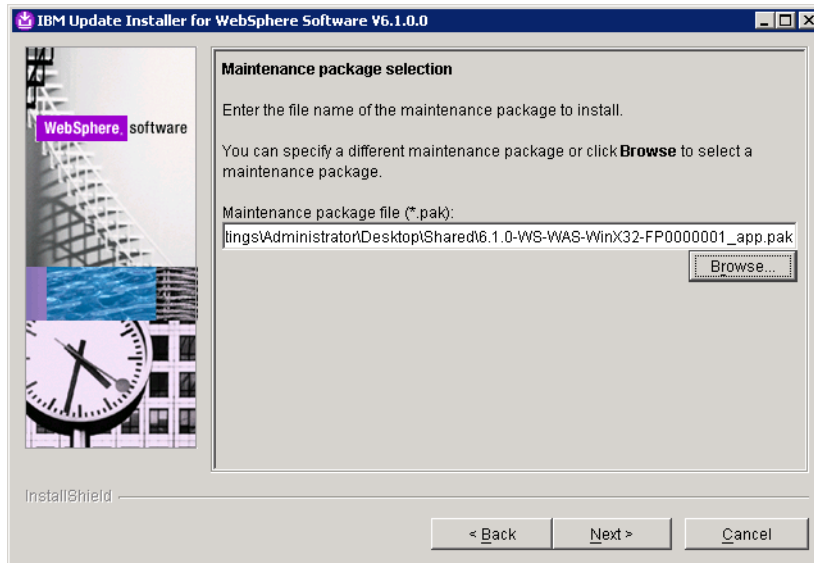

6. In the “Maintenance packages selected” screen, click **Next**.
7. When the update process completes successfully, click **Finish**.

D. Modifying the WAS Start Script

For WAS to properly support Content Server, you must make the following modifications to the WAS start script:

To modify the WAS start script

1. Open the WAS start script file in a text editor. The location and name of the file are:
 - On Windows: <WAS_home>\bin\startServer.bat
 - On Unix: <WAS_home>/bin/startServer.sh
2. Locate the line that begins with `set CLASSPATH=` and add the following string at the end of that line:


```
-Dhkr=true -Dfile.encoding=UTF-8
```
3. (Unix only) Add the following line after the initial comment section:
 - For Unix:


```
<LIBRARY_PATH>=<cs_install_dir>/bin:<LIBRARY_PATH>
```
 - For HP-UX:


```
<SHLIB_PATH>=<cs_install_dir>/bin:<SHLIB_PATH>
```
 - For Linux and Solaris:


```
<LD_LIBRARY_PATH>=<cs_install_dir>/bin:<LD_LIBRARY_PATH>
```
 - For AIX:


```
<LIBPATH>=<cs_install_dir>/bin:<LIBPATH>
```
4. (Windows only) Add <cs_install_dir>/bin to your system path variable.

Creating a WAS Instance

This section shows you how to create an application server instance using the Profile Management Tool and the command line.

Note

For 32-bit platforms, we recommend that you use the Profile Management Tool to create the necessary profiles. For 64-bit platforms, you will need to use the command-line tool, `manageprofiles.sh`, as the Profile Management Tool is not available for 64-bit platforms.

This section contains the following procedures:

- [Creating a WAS Instance Using the Profile Management Tool](#)
- [Creating a WAS Instance Using the Command Line](#)

Creating a WAS Instance Using the Profile Management Tool

This section shows you how to create a WAS instance using the Profile Management Tool.

To create a WAS instance using the Profile Management Tool


1. Run the Profile Management Tool:

- On Windows: `<WAS_home>\bin\ProfileManagement\pmt.bat`
- On Unix: `<WAS_home>/bin/ProfileCreator/pct<OS_type>.bin`


Note

If you are running the Profile Management Tool on Unix, run the version of the tool appropriate to your operating system. The `ProfileCreator` directory contains multiple versions of the tool that correspond to different versions of the Unix operating system.


2. In the “Welcome” screen, click **Next**.

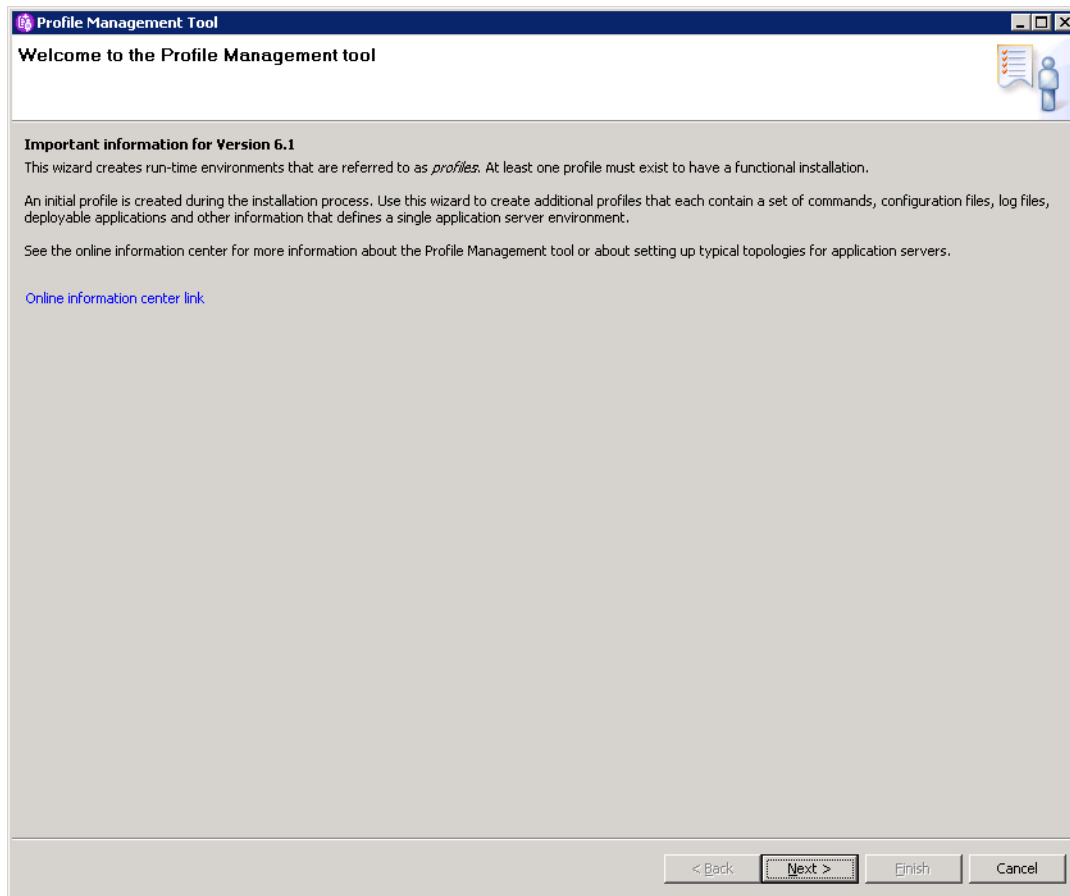

3. In the “Environment Selection” screen, select **Application server** and click **Next**.

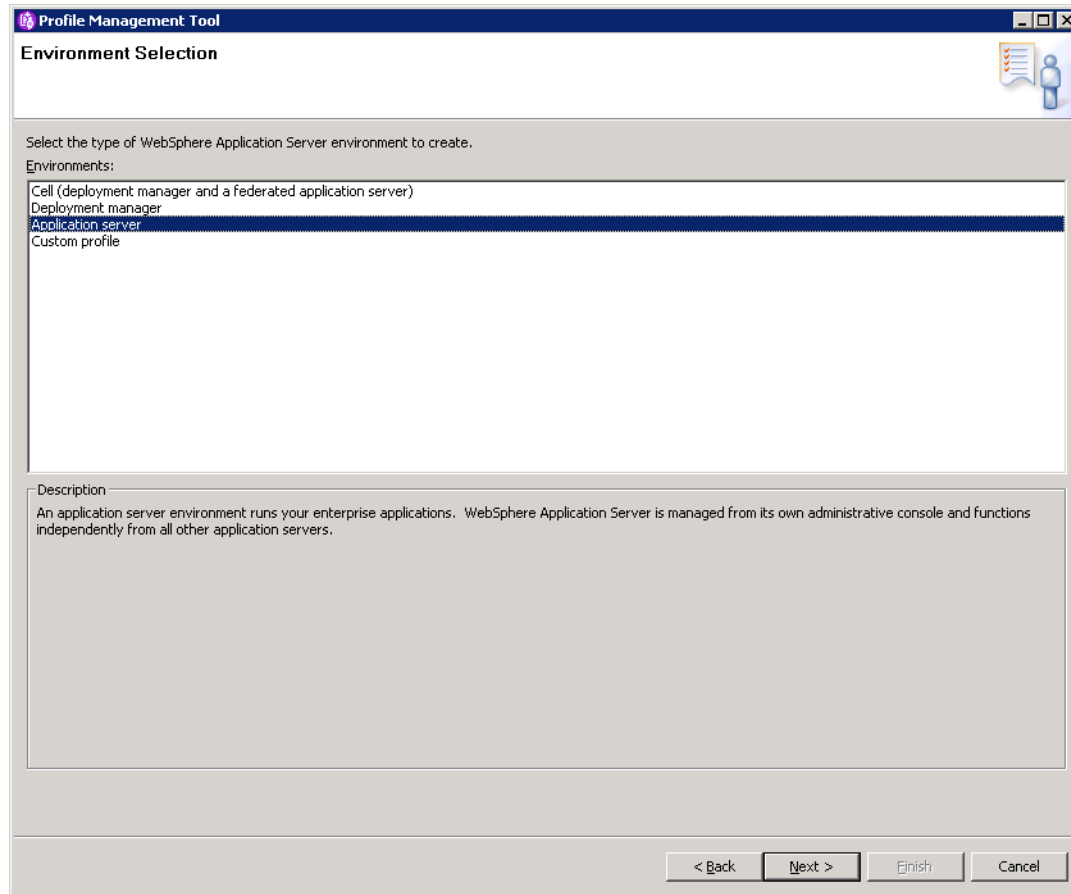


4. In the “Profile Creation Options” screen, do one of the following:
- To use the default profile name, node name, and port numbers, select **Typical profile creation** and click **Next**.
 - If you wish to specify your own profile name, node name, or port numbers, select **Advanced profile creation** and click **Next**.

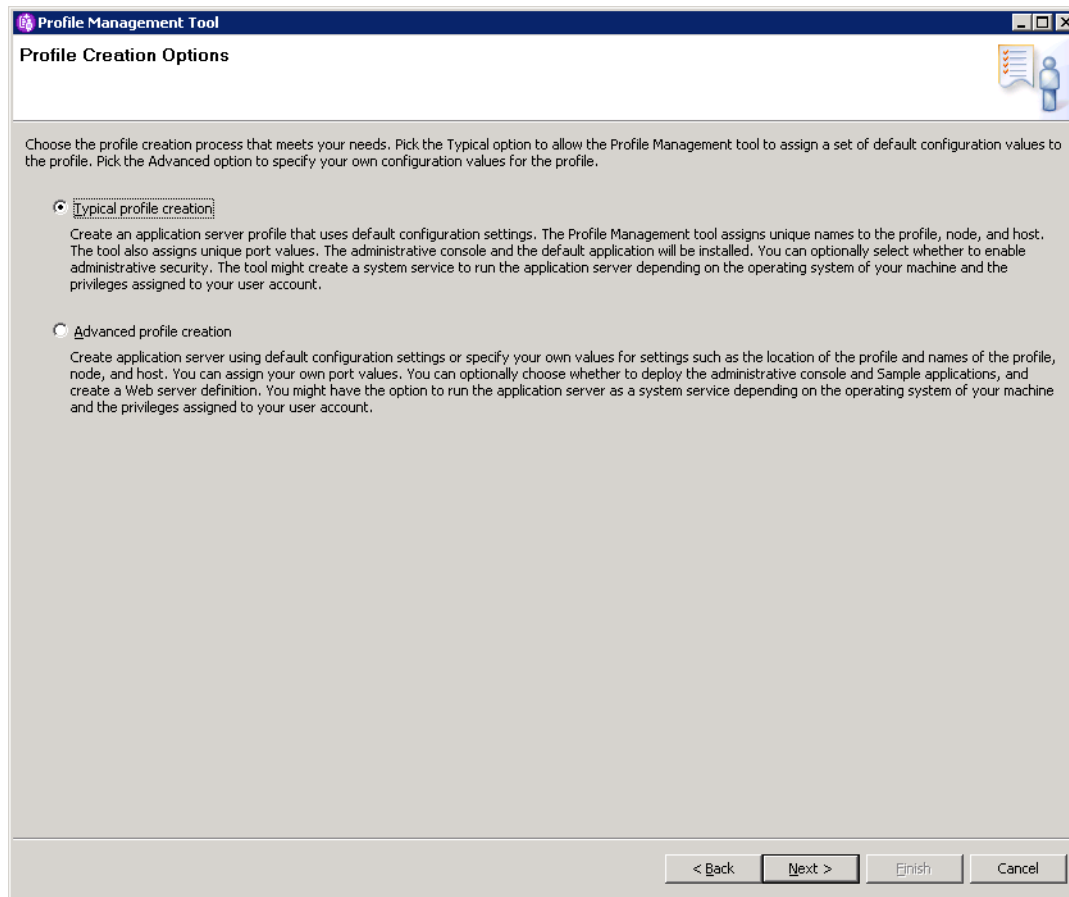

5. In the “Administrative Security” screen, do one of the following:
 - If you wish to enable administrative security, select the **Enable administrative security** check box and enter a user name and password. (Re-enter the password for verification.)
 - If you do not wish to enable administrative security, leave the **Enable administrative security** check box deselected and click **Next**.

For more information on the administrative security option, consult the WebSphere documentation.

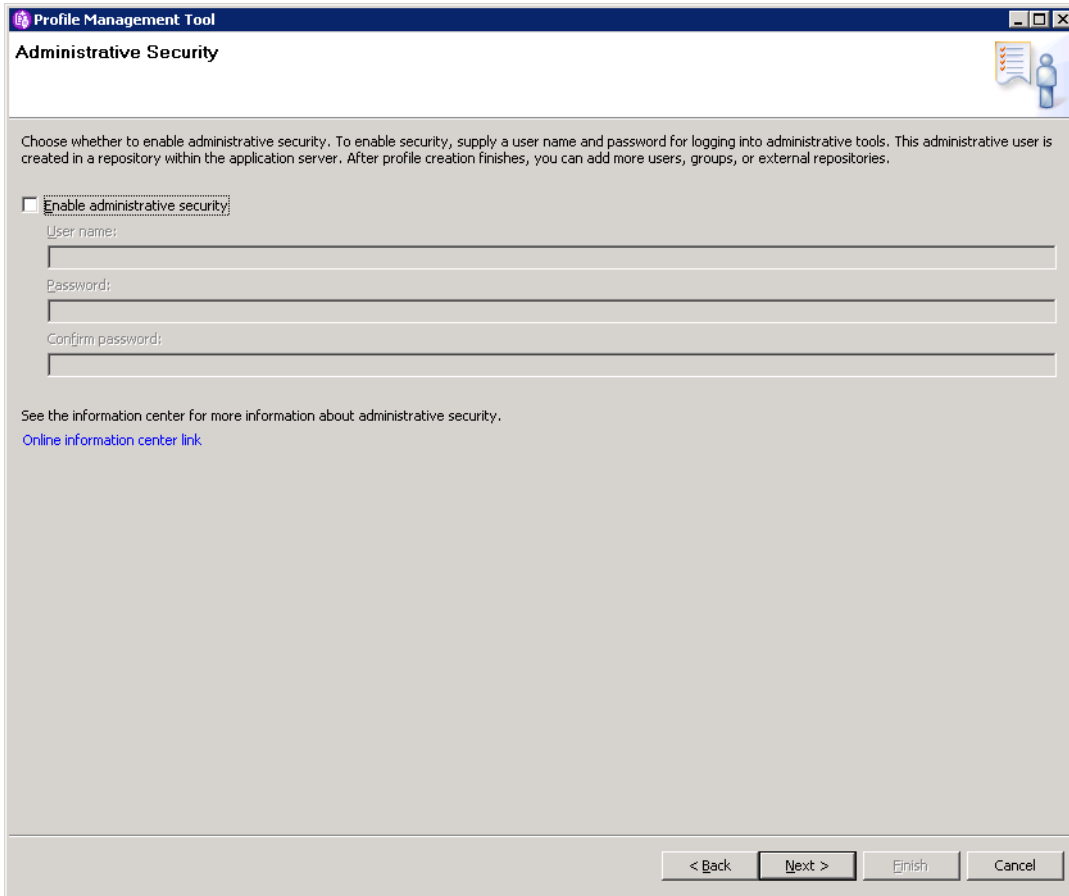


The screenshot shows the "Profile Management Tool" window with the "Administrative Security" tab selected. The window title bar includes standard OS controls. The main content area has a header "Administrative Security" and a sub-header "Choose whether to enable administrative security. To enable security, supply a user name and password for logging into administrative tools. This administrative user is created in a repository within the application server. After profile creation finishes, you can add more users, groups, or external repositories." Below this, there is a checkbox labeled "Enable administrative security" which is currently unchecked. Underneath the checkbox are three text input fields labeled "User name:", "Password:", and "Confirm password:". At the bottom of the main content area, there is a link that says "See the information center for more information about administrative security. [Online information center link](#)". The bottom of the window features a navigation bar with four buttons: "< Back", "Next >", "Finish", and "Cancel".

6. In the “Profile Creation Summary” screen, review the settings you have chosen. Write down the values of the following parameters for reference during further configuration:

- **Profile name**
- **Node name**
- **HTTP transport port**
- **HTTPS transport port**

When you are finished, click **Create**.

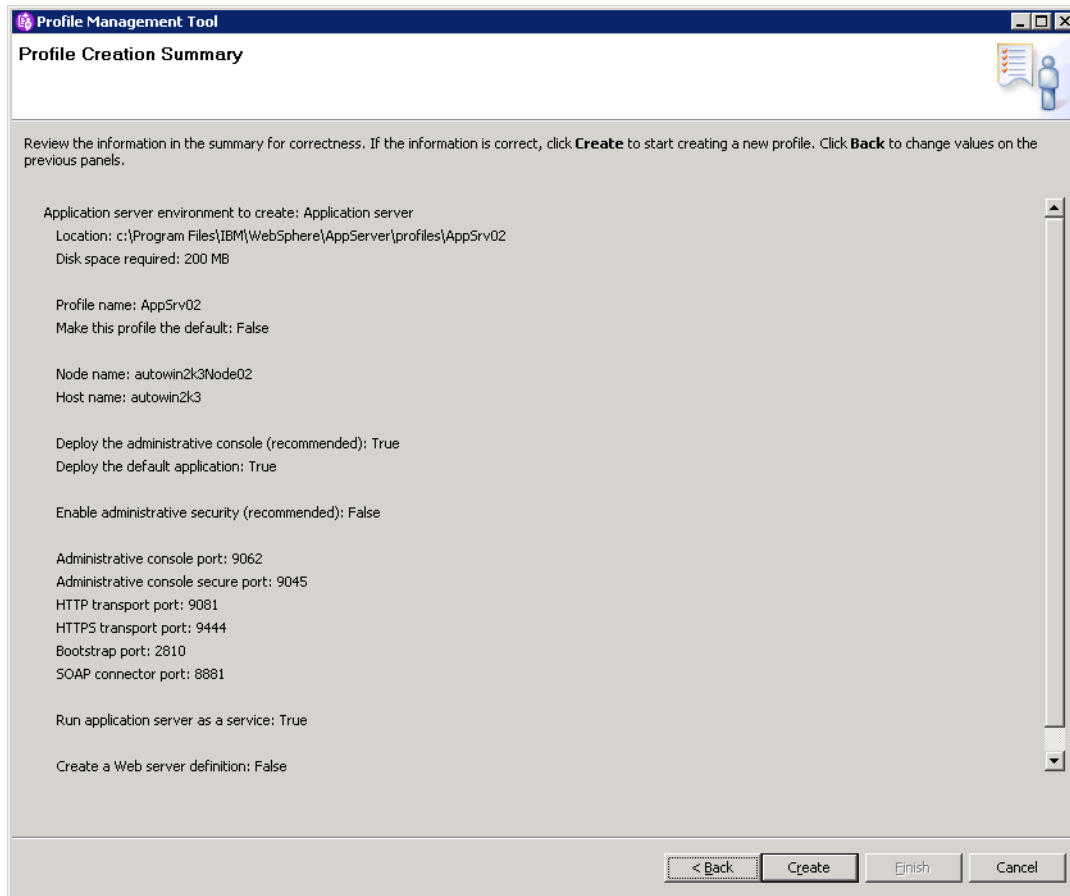

The screenshot shows the 'Profile Management Tool' window with the 'Profile Creation Summary' tab selected. The window contains a list of configuration parameters for creating a new profile. At the bottom, there are four buttons: '< Back', 'Create', 'Finish', and 'Cancel'.

Profile Management Tool
Profile Creation Summary

Review the information in the summary for correctness. If the information is correct, click **Create** to start creating a new profile. Click **Back** to change values on the previous panels.

Application server environment to create: Application server
Location: c:\Program Files\IBM\WebSphere\AppServer\profiles\AppSrv02
Disk space required: 200 MB

Profile name: AppSrv02
Make this profile the default: False

Node name: autowin2k3Node02
Host name: autowin2k3

Deploy the administrative console (recommended): True
Deploy the default application: True

Enable administrative security (recommended): False


Administrative console port: 9062
Administrative console secure port: 9045
HTTP transport port: 9081
HTTPS transport port: 9444
Bootstrap port: 2810
SOAP connector port: 8881

Run application server as a service: True

Create a Web server definition: False

< Back Create Finish Cancel

7. In the “Profile Creation Complete” screen, deselect the **Launch the First steps console** check box and click **Finish**.

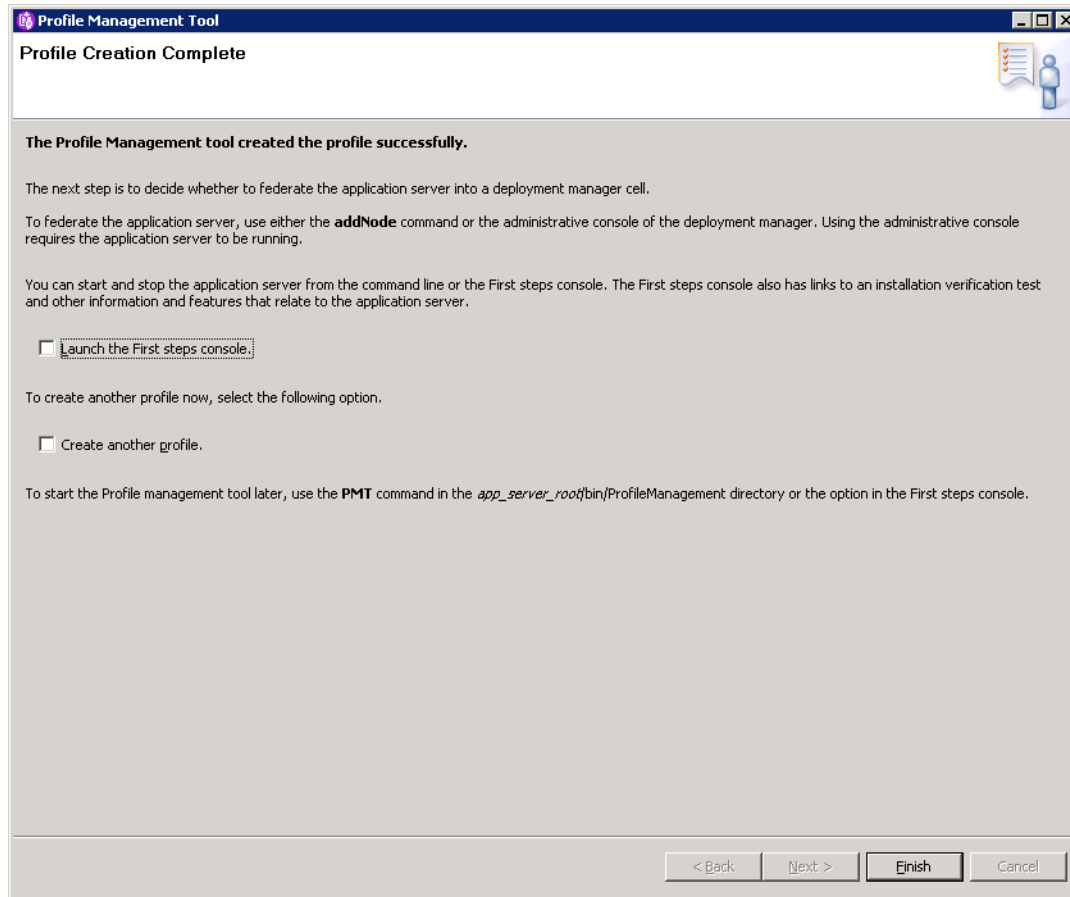

8. If you are creating a Content Server cluster, repeat this procedure for each member of the cluster.

Creating a WAS Instance Using the Command Line

This section shows you how to create a WAS instance using the command line.

Note

On Windows, the names of the command-line tools used in this section end with `.bat` instead of `.sh`. Remember to make the necessary substitution when executing the commands on a Windows system.

To create a WAS instance using the command line

1. Change to the `<WAS_home>/bin` directory.
2. List existing profiles by executing the following command:

```
./manageprofiles.sh -listProfiles
```

A typical response from this command looks as follows:

```
[Dmgr01]
[AppSvr01]
```

In this example, there are two existing profiles: a Deployment Manager profile named `Dmgr01`, and an application server profile named `AppSvr01`.

3. (Optional) Delete any unwanted profiles. Do the following:
 - a. Stop the unwanted server instances (for instructions, see [“Start/Stop Commands,” on page 18](#)).
 - b. Delete each unwanted profile by executing the following command:


```
./manageprofiles.sh -delete -profileName <profile_name>
```
 - c. Delete the leftover profile directory, `<WAS_home>/<profile_name>`.
4. Create a Deployment Manager profile by executing the following command:

Note

The default parameter values for this command are as follows:

- `<appserv_cell>` is typically `<WAS_host>Cell01`
- `<appserv_node>` is typically `<WAS_host>managerNode01`
- `<DM_profile>` is typically `Dmgr01`
- `<appserv_profile>` is typically `AppSrv01`

Note the parameter values you specify in this step. You must use them when creating the application server profile in the next step.

```
./manageprofiles.sh -create \ -templatePath <WAS_home>/
  profileTemplates/dmgr \ -nodeProfilePath /<WAS_home>/
  profiles/<appserv_profile> \ -profileName <DM_profile> \
  -cellName <appserv_cell> \ -nodeName <appserv_node> \
  -isDefault -defaultPorts -validatePorts
```

5. Create an application server profile by executing the following command:

Note

The default parameter values for this command are as follows:

- `<appserv_cell>` is typically `<WAS_host>Cell01`
- `<appserv_node>` is typically `<WAS_host>managerNode01`
- `<DM_profile>` is typically `Dmgr01`
- `<appserv_profile>` is typically `AppServ01`

If you are not using the defaults, make sure you are using the parameter values you specified in [step 4](#).

```
./manageprofiles.sh -create \ -templatePath <WAS_home>/  
profileTemplates/default \ -profileName <appserv_profile> \  
-cellName <appserv_cell> \ -nodeName <appserv_node> \  
-isDefault
```

6. Start the Deployment Manager using the Deployment Manager profile you created (for instructions, see [“Start/Stop Commands,” on page 18](#)).
7. Start the new application server instance (for instructions, see [“Start/Stop Commands,” on page 18](#)).
8. Federate the WAS instance with the Deployment Manager by executing the following command:

Note

The default Deployment Manager SOAP port is 8879.

```
./addNode.sh <DM_host> <DM_SOAP_port>
```

9. Stop the Application Server (for instructions, see [“Start/Stop Commands,” on page 18](#)).
10. Stop the Node Agent (for instructions, see [“Start/Stop Commands,” on page 18](#)).
11. Stop the Deployment Manager (for instructions, see [“Start/Stop Commands,” on page 18](#)).
12. (Optional) If you are creating a Content Server cluster, repeat this procedure for each member of the cluster.

Configuring the WAS Instance for Database Communications

This section explains how to configure the WAS instance you created in the previous section to communicate with the database Content Server will be using.

This section contains the following steps:

- [A. Creating a J2C Authentication](#)
- [B. Creating a JDBC Provider](#)
- [C. Creating a JDBC Data Source](#)

Note

- Before completing the steps in the rest of this chapter, start the following WAS components, in the order shown. For a list of commands for starting and stopping WAS components, see [“Start/Stop Commands,” on page 18](#).
 1. Deployment Manager
 2. Node Agent
 3. Application Server
- If you are using an Oracle database and require text attributes greater than 2000 characters, you will have to set `cc.bigtext` to `CLOB`. To support `CLOB`, use Oracle database 9.2.0.6 (or a higher supported version). Also use Oracle 10g drivers. (`CLOB` is not supported for lower database versions and for Oracle drivers 9x [thin, type 4].)

You will set `cc.bigtext` to `CLOB` when you run the Content Server installer (as explained in [“Running the Installer,” on page 86](#)).

A. Creating a J2C Authentication

The J2C authentication contains the login information that WAS will use to connect to the Content Server database.

A J2C authentication is the first of the three components required to set up your WAS instance to connect to your database.

If you are creating a Content Server cluster, the cluster members can share the same J2C authentication.

To create a J2C authentication

1. Log in to the Deployment Manager console:

Note

The default Deployment Manager console port is 9060.

- a. Point your browser to the following URL:

`http://<DM_host>:<DM_console_port>/admin`


- b. Enter your user name and password.
- c. Click **Log in**.

The Deployment Manager console loads.


2. In the left-hand pane, expand the **Security** node.




3. Under the **Security** node, select **Secure administration, applications, and infrastructure**.
4. In the “Authentication” area in the right-hand pane, expand the **Java Authentication and Authorization Service** node and click **J2C authentication data**.

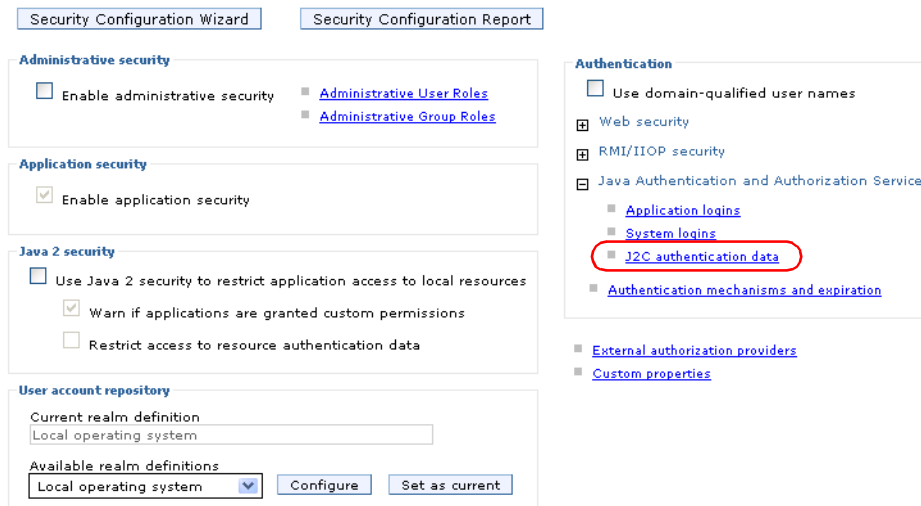

The console displays the “JAAS – J2C authentication data” screen.

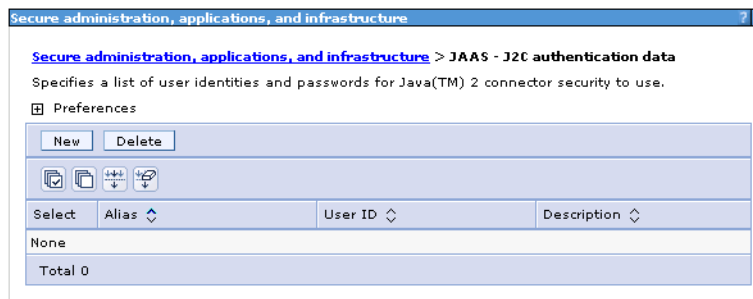


5. In the “JAAS – J2C authentication data” screen, click **New**. The console displays the “Configuration” tab.

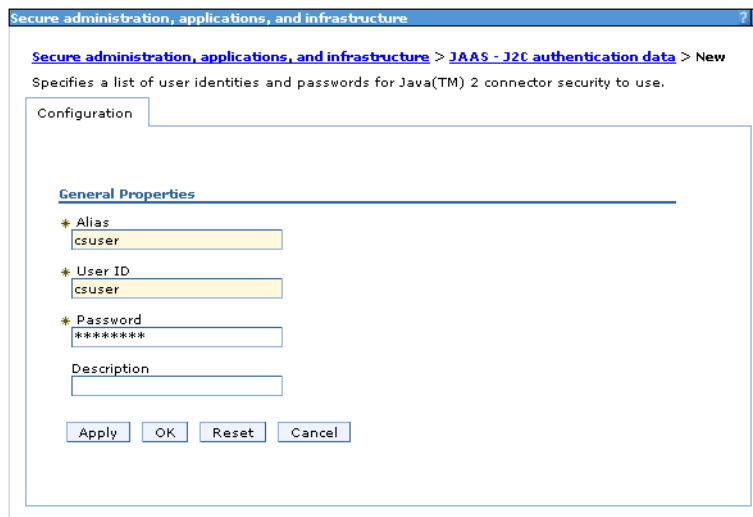


6. In the “Configuration” tab, do the following:
 - a. In the **Alias** field, enter a unique alias for this J2C authentication.
 - b. In the **User ID** and **Password** fields, enter the credentials of the database user account WAS will use to connect to the Content Server database. (Re-enter the password for verification.)


- c. When you are finished, click **OK**. The J2C authentication you created appears in the list in the “JAAS – J2C authentication data” screen.

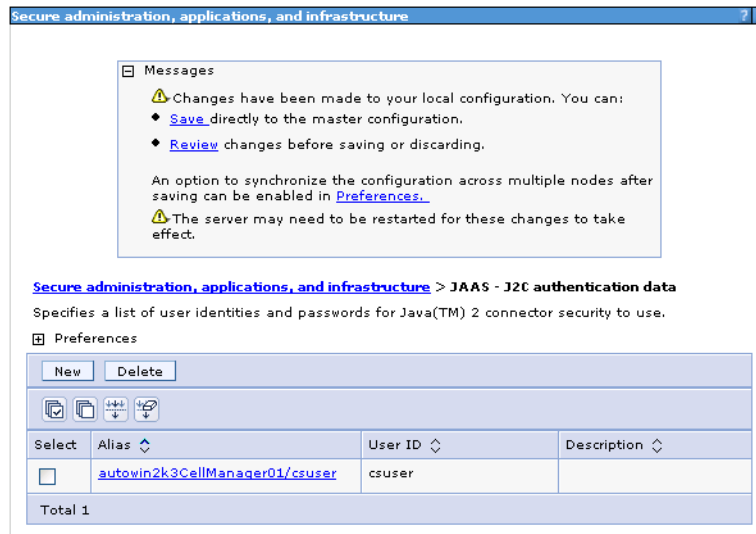

7. In the “Messages” box, click **Save**.
8. In the “Save” screen, do the following:
 - a. Select the **Synchronize changes with nodes** check box.
 - b. Click **Save**.

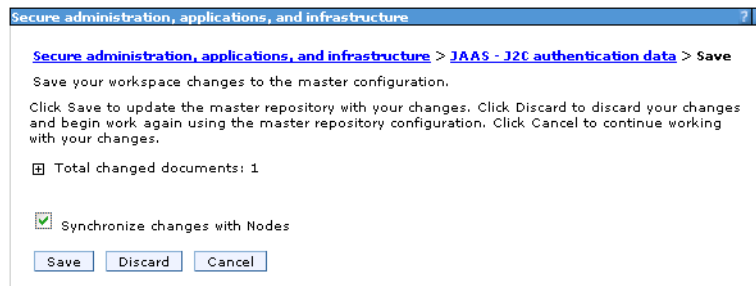

9. In the “Synchronize changes with nodes” screen, click **OK**.

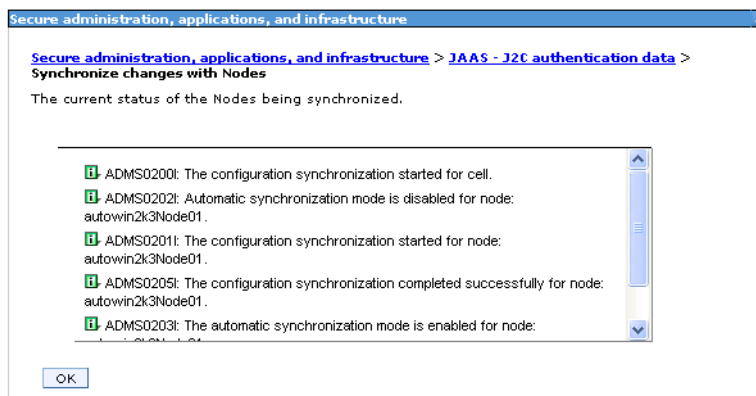

10. Restart the application server for the changes to take effect. For a list of start and stop commands, see “[Start/Stop Commands](#),” on page 18.

B. Creating a JDBC Provider

A JDBC provider encapsulates all data sources that use a vendor-specific JDBC driver implementation.

A JDBC provider is the second of the three components required to set up your WAS instance to connect to your database.

If you are creating a Content Server cluster, you must create a separate JDBC provider for each cluster member.

To create a JDBC provider

1. If you are using a DB2 or Oracle database, place the following JAR files in the `<WAS_home>/universalDriver/lib` directory:

Note

If you are using SQL Server, skip this step.


- For DB2:
 - `db2jcc.jar`
 - `db2jcc_license_cu.jar`
 - For Oracle:
 - `ojdbc14.jar`
2. Log in to the Deployment Manager console:

Note


The default Deployment Manager console port is 9060.

- a. Point your browser to the following URL:
`http://<DM_host>:<DM_console_port>/admin`
- b. Enter your user name and password.
- c. Click **Log in**.
The Deployment Manager console loads.

3. In the left-hand pane, expand the **Resources** node.

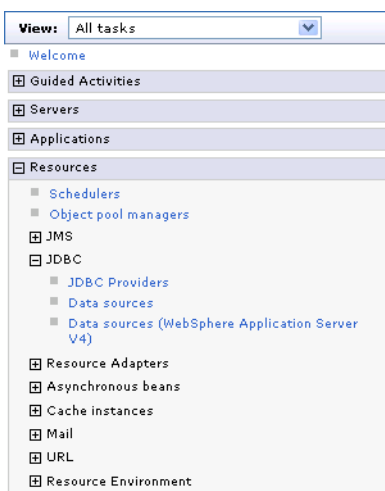

4. Under the **Resources** node, expand the **JDBC** node and click **JDBC Providers**. The console displays the “JDBC providers” screen.

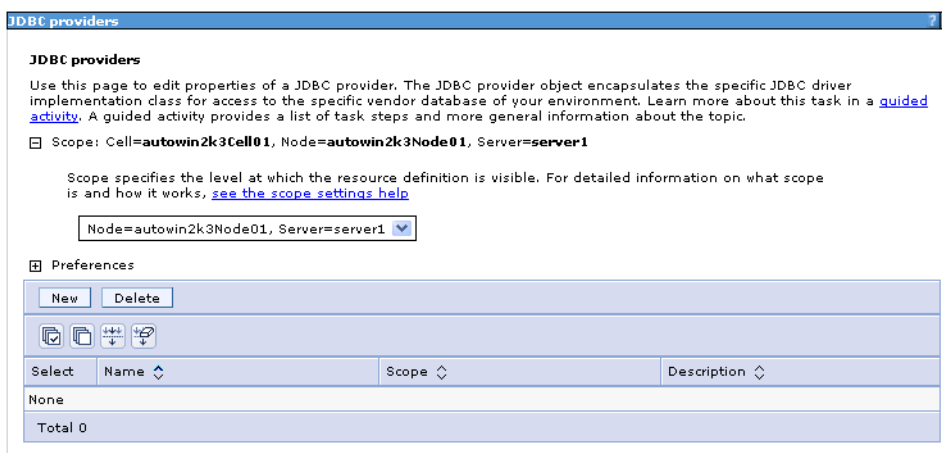

5. In the “Scope” area of the “JDBC providers” screen, select **Node=<appserv_node>**, **Server=<server_name>** from the drop-down list and click **New**.

Note

The default name of the first application server node created is `<WAS_host>Node01`.

The default server name is `server1`.

6. In the “Create a new JDBC provider” screen, do the following:
- In the “Database type” drop-down list, select the database Content Server will be using.

- b. In the “Provider type” drop-down list, select the provider corresponding to the database you selected in [step a](#), as shown in the following table:

Database type	Corresponding provider type
DB2	Universal JDBC Driver Provider
Oracle	Oracle JDBC Driver
SQL Server	WebSphere embedded ConnectJDBC driver for MS SQL Server

- c. In the “Implementation type” drop-down list, select **Connection pool data source**.
- d. In the **Name** field, enter a unique name for this JDBC provider.
- e. Click **Next**.

Create a new JDBC Provider

Create a new JDBC Provider

→ **Step 1: Create new JDBC provider**

Step 2: Enter database class path information

Step 3: Summary

Create new JDBC provider

Set the basic configuration values of a JDBC provider, which encapsulates the specific vendor JDBC driver implementation classes that are required to access the database. The wizard fills in the name and the description fields, but you can type different values.

Scope
cells:autowin2k3Cell01:nodes:autowin2k3Node01:servers:server1

* Database type
DB2

* Provider type
DB2 Universal JDBC Driver Provider

* Implementation type
Connection pool data source

* Name
DB2 Universal JDBC Driver Provider

Description
Non-XA DB2 Universal JDBC Driver-compliant Provider. **Datasources** created under this provider support only 1-phase commit processing except in the case where driver type 2 is used under WAS z/OS. On WAS z/OS, driver type 2 uses RRS and supports 2-phase commit processing

Next Cancel

7. In the “Enter database class path information” screen, do one of the following:

- If you selected **DB2** or **Oracle** in [step 6](#), enter the location containing the database-specific JAR files you copied in [step 1](#), that is:

<WAS_home>/universalDriver/lib

When you are finished, click **Next**.

- If you selected **SQL Server** in [step 6](#), click **Next**.

Create a new JDBC Provider

Create a new JDBC Provider

Step 1: Create new JDBC provider
 → **Step 2: Enter database class path information**
 Step 3: Summary

Enter database class path information

Set the environment variables that represent the JDBC driver class files, which WebSphere(R) Application Server uses to define your JDBC provider. This wizard page displays the file names; you supply only the directory locations of the files. Use complete directory paths when you type the JDBC driver file locations. For example: /home/db2inst1/sqllib/java on Linux(TM). If a value is specified for you, you may click Next to accept the value.

Class path:

```
{DB2UNIVERSAL_JDBC_DRIVER_PATH}/db2jcc.jar
{UNIVERSAL_JDBC_DRIVER_PATH}/db2jcc_license_cu.jar
{DB2UNIVERSAL_JDBC_DRIVER_PATH}/db2jcc_license_cisuz.jar
```

Directory location for "db2jcc.jar, db2jcc_license_cisuz.jar" which is saved as WebSphere variable `{DB2UNIVERSAL_JDBC_DRIVER_PATH}`:
`C:\u01\software\Apps\Websphere61\AppServer\universalDriver\lib`

Native library path

Directory location which is saved as WebSphere variable `{DB2UNIVERSAL_JDBC_DRIVER_NATIVEPATH}`:

Previous Next Cancel

8. In the “Summary” screen, review the settings you have chosen, then click **Finish**.

Create a new JDBC Provider

Create a new JDBC Provider

Step 1: Create new JDBC provider
 Step 2: Enter database class path information
 → **Step 3: Summary**

Summary

Summary of actions:

Options	Values
Scope	cells:autowin2k3Cell01:nodes:autowin2k3Node01:servers:server1
JDBC provider name	DB2 Universal JDBC Driver Provider
Description	Non-XA DB2 Universal JDBC Driver-compliant Provider. Datasources created under this provider support only 1-phase commit processing except in the case where driver type 2 is used under WAS z/OS. On WAS z/OS, driver type 2 uses RRS and supports 2-phase commit processing
Class path	<code>{DB2UNIVERSAL_JDBC_DRIVER_PATH}/db2jcc.jar</code> <code>{UNIVERSAL_JDBC_DRIVER_PATH}/db2jcc_license_cu.jar</code> <code>{DB2UNIVERSAL_JDBC_DRIVER_PATH}/db2jcc_license_cisuz.jar</code>
<code>{DB2UNIVERSAL_JDBC_DRIVER_PATH}</code>	<code>C:\u01\software\Apps\Websphere61\AppServer\universalDriver\lib</code>
<code>{UNIVERSAL_JDBC_DRIVER_PATH}</code>	null
Native path	<code>{DB2UNIVERSAL_JDBC_DRIVER_NATIVEPATH}</code>
<code>{DB2UNIVERSAL_JDBC_DRIVER_NATIVEPATH}</code>	
Implementation class name	com.ibm.db2.jcc.DB2ConnectionPoolDataSource

Previous Finish Cancel

9. In the “Messages” box, click **Review**.
10. In the “Save” screen, do the following:
 - a. Select the **Synchronize changes with nodes** check box.
 - b. Click **Save**.
11. In the “Synchronize changes with nodes” screen, click **OK**.

The console redisplay the “JDBC Providers” screen. The new JDBC provider appears in the list of providers in the right-hand pane.

12. If you selected **DB2** in [step 6](#), do the following:

Note

If you selected **Oracle** or **SQL Server** in [step 6](#), skip the steps below and proceed to the next section.

- a. In the list of JDBC providers in the right-hand pane, select the JDBC provider you created earlier in this section.
- b. In the **Class path** field of the “DB2 Universal JDBC driver provider” screen, do the following:
 - 1) Delete the path to the `db2jcc_license_cisuz.jar` file.
 - 2) Change the variable name for the `db2jcc_license_cu.jar` file
 from: `${UNIVERSAL_JDBC_DRIVER_PATH}`
 to: `${DB2UNIVERSAL_JDBC_DRIVER_PATH}`

[JDBC providers](#) > DB2 Universal JDBC Driver Provider

Use this page to edit properties of a JDBC provider. The JDBC provider object encapsulates the specific JDBC driver implementation class for access to the specific vendor database of your environment.

The screenshot shows the 'DB2 Universal JDBC Driver Provider' configuration page. The 'General Properties' tab is active. The 'Class path' field is highlighted, showing the variable `${UNIVERSAL_JDBC_DRIVER_PATH}/db:` which is being edited to `${DB2UNIVERSAL_JDBC_DRIVER_PATH}`. The 'Native library path' field is also visible, showing `${DB2UNIVERSAL_JDBC_DRIVER_NATIV}`. The 'Implementation class name' field is set to `com.ibm.db2.jcc.DB2ConnectionPoolDataSource`. The 'Additional Properties' tab is also visible, showing 'Data sources' and 'Data sources (WebSphere Application Server V4)'.

- c. Click **OK**.
- d. In the “Messages” box, click **Review**.
- e. In the “Save” screen, do the following:
 - 1) Select the **Synchronize changes with nodes** check box.
 - 2) Click **Save**.
- f. In the “Synchronize changes with nodes” screen, click **OK**.

C. Creating a JDBC Data Source

Once you have created the J2C authentication and the JDBC provider, you must create a data source.

A data source is the final component required to set up your WAS instance to connect to your database.

If you are creating a Content Server cluster, each cluster member data source must use:

- The J2C authentication you created in step [A. Creating a J2C Authentication](#).
- The JDBC provider created for the scope of that cluster member.

Note

Before starting this procedure, make sure you have done the following:

1. Created a J2C authentication by following the steps in step [A. Creating a J2C Authentication](#).
2. Created a JDBC provider by following the steps in step [B. Creating a JDBC Provider](#).

To create a JDBC data source


1. Log in to the Deployment Manager console:

Note


The default Deployment Manager console port is 9060.

- a. Point your browser to the following URL:
`http://<DM_host>:<DM_console_port>/admin`
- b. Enter your user name and password.
- c. Click **Log in**.
The Deployment Manager console loads.

2. In the left-hand pane, expand the **Resources** node.

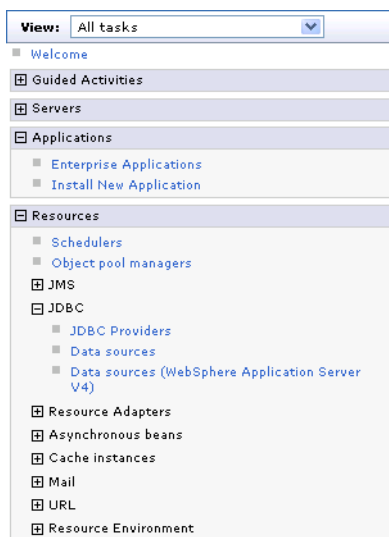

3. Under the **Resources** node, expand the **JDBC** node, and click **Data sources**. The console displays the “Data sources” screen.

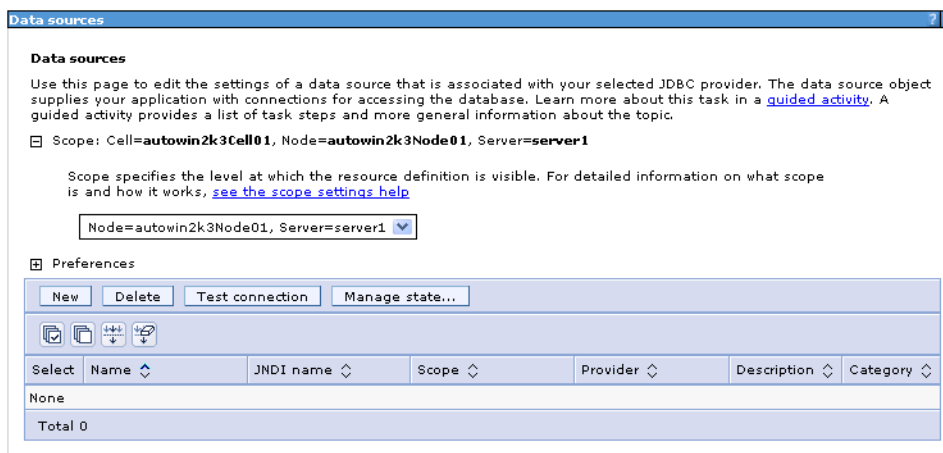

4. In the “Scope” area of the “Data sources” screen, select **Node=<appserv_node>**, **Server=<server_name>** from the drop-down list and click **New**.

Note

The default name of the first application server node created is `<WAS_host>Node01`.

The default server name is `server1`.

5. In the “Enter basic data source information” screen, do the following:
 - a. In the **Data source name** field, enter a unique name for this data source.
 - b. In the **JNDI name** field, enter the JNDI name for this data source.

- c. In the “Component-managed authentication alias” drop down list, select the J2C authentication you created in step [A. Creating a J2C Authentication](#).
- d. Click **Next**.

Create a data source

Create a data source

- Step 1: Enter basic data source information
- Step 2: Select JDBC provider
- Step 3: Enter database specific properties for the data source
- Step 4: Summary

Enter basic data source information

Set the basic configuration values of a data source for association with your JDBC provider. A data source supplies the physical connections between the application server and the database.

Requirement: Use the Data sources (WebSphere(R) Application Server V4) console pages if your applications are based on the Enterprise JavaBeans(TM) (EJB) 1.0 specification or the Java(TM) Servlet 2.2 specification.

Scope
cells:autowin2k3Cell01:nodes:autowin2k3Node01:servers:server1

* Data source name
csDataSource

* JNDI name
csDataSource

Component-managed authentication alias and XA recovery authentication alias

Select a component-managed authentication alias. The selected authentication alias will also be set as the XA recovery authentication alias if your JDBC Provider supports XA. If you choose to [create a new J2C authentication alias](#), the wizard will be canceled.

autowin2k3CellManager01/csuser

Next Cancel

6. In the “Select JDBC provider” screen, do the following:
 - a. Select **Select an existing JDBC provider**.
 - b. In the drop-down list, select the JDBC provider you created in step [B. Creating a JDBC Provider](#).
 - c. When you are finished, click **Next**.

Create a data source

Create a data source

- Step 1: Enter basic data source information
- Step 2: Select JDBC provider
- Step 3: Enter database specific properties for the data source
- Step 4: Summary

Select JDBC provider

Specify a JDBC provider to support this data source.

☐ Create new JDBC provider

☒ Select an existing JDBC provider

DB2 Universal JDBC Driver Provider

Previous Next Cancel

7. In the “Enter database-specific properties for the data source” screen, do one of the following:
 - If you selected a DB2 JDBC provider in [step 6](#), do the following:
 - 1) In the **Database name** field, enter the name of the database Content Server will be using.
 - 2) In the “Driver type” drop-down list, select **4**.

- 3) In the **Server name** field, enter the host name or IP address of the machine running the Content Server database.
- 4) In the **Port number** field, enter the port number on which the Content Server database is listening for connections.
- 5) Select the **Use this data source in container managed persistence (CMP)** check box.
- 6) Click **Next**.

Create a data source

Create a data source

Step 1: Enter basic data source information

Step 2: Select JDBC provider

→ Step 3: Enter database specific properties for the data source

Step 4: Summary

Enter database specific properties for the data source

Set these database-specific properties, which are required by the database vendor JDBC driver to support the connections that are managed through this data source.

* Database name
autodb

* Driver type
4

* Server name
wow.fatwire.com

* Port number
50001

☒ Use this data source in container managed persistence (CMP)

Previous Next Cancel

- If you selected an Oracle JDBC provider in [step 6](#), do the following:
 - 1) In the **URL** field, enter the URL of the database Content Server will be using. The URL you enter must be in the following format:
`jdbc:oracle:thin:@//<db_host>:<db_port>/<db_name>`
where:
 - <db_host> is the host name or IP address of the machine running the Content Server database.
 - <db_port> is the port number on which the Content Server database is listening for connections.
 - <db_name> is the name of the Content Server database.
 - 2) In the “Data store helper class name” drop-down list, select **Oracle10g data store helper**.
 - 3) Select the **Use this data source in container managed persistence (CMP)** check box.

4) Click **Next**.

Create a data source

Enter database specific properties for the data source

Set these database-specific properties, which are required by the database vendor JDBC driver to support the connections that are managed through this data source.

* URL
oracle:thin:@//reaper.fatwire.com:1521/autodb

* Data store helper class name
Oracle10g data store helper

☒ Use this data source in container managed persistence (CMP)

Previous Next Cancel

- If you selected an SQL Server provider in [step 6](#), do the following:
 - 1) In the **Database name** field, enter the name of the database Content Server will be using.
 - 2) In the “Driver type” drop-down list, select **4**.
 - 3) In the **Server name** field, enter the host name or IP address of the machine running the Content Server database.
 - 4) In the **Port number** field, enter the port number on which the Content Server database is listening for connections.
 - 5) Select the **Use this data source in container managed persistence (CMP)** check box.
 - 6) Click **Next**.

Create a data source

Enter database specific properties for the data source

Set these database-specific properties, which are required by the database vendor JDBC driver to support the connections that are managed through this data source.

* Database name
autodb

* Server name
apiw2k3.fatwire.com

* Port number
1433

☒ Use this data source in container managed persistence (CMP)

Previous Next Cancel

8. In the “Summary” screen, review the settings you have chosen, then click **Finish**.
9. In the “Messages” box, click **Review**.
10. In the “Save” screen, do the following:
 - a. Select the **Synchronize changes with nodes** check box.
 - b. Click **Save**.
11. In the “Synchronize changes with nodes” screen, click **OK**. The console redisplay the “Data sources” screen showing the data source you just created.
12. In the list of data sources, select the data source you just created.

13. In the “Additional Properties” area of the “Data source” screen, click **Connection pool properties**.

[Data sources](#) > [csDataSource](#)

Use this page to edit the settings of a data source that is associated with your selected JDBC provider. The data source object supplies your application with connections for accessing the database.

Configuration

General Properties	Additional Properties
★ Scope cells:autowin2k3Cell01:nodes:autowin2k3Node01:servers:server1	Connection pool properties
★ Provider DB2 Universal JDBC Driver Provider	WebSphere Application Server data source properties

14. In the “Connection pools” screen, do the following:
- In the **Maximum connections** field, enter 100 (or a value appropriate to your configuration, if known).
 - In the **Minimum connections** field, enter 10 (or a value appropriate to your configuration, if known).
 - Click **OK**.

[Data sources](#)

[Data sources](#) > [csDataSource](#) > [Connection pools](#)

Use this page to set properties that impact the timing of connection management tasks, which can affect the performance of your application. Consider the default values carefully; your application requirements might warrant changing these values.

Configuration

General Properties	Additional Properties
Scope cells:autowin2k3Cell01:nodes:autowin2k3Node01:servers:server1	Advanced connection pool properties Connection pool custom properties
Connection timeout 180 seconds	
Maximum connections 100 connections	
Minimum connections 10 connections	
Reap time 180 seconds	
Unused timeout 1800 seconds	
Aged timeout 0 seconds	
Purge policy EntirePool	

15. In the “Messages” box, click **Review**.
16. In the “Save” screen, do the following:
- Select the **Synchronize changes with nodes** check box.
 - Click **Save**.
17. In the “Synchronize changes with nodes” screen, click **OK**.
18. If you are creating a Content Server cluster, repeat [steps 4–17](#) of this procedure for each cluster member.

Deploying the Content Server Application

Half-way through the Content Server installation, you will have to deploy the CS application. This section describes how to deploy the Content Server application on WAS using the Deployment Manager console.

If you are creating a Content Server cluster, you must install and deploy a separate CS application for each member of the cluster. Each CS application in the cluster must have a unique name.

Note

Before starting this procedure, make sure you have done the following:

1. Created a WAS instance which will run the CS application by following the steps in [“Creating a WAS Instance,” on page 28.](#)
2. Set up the WAS instance for database communications by following the steps in [“Configuring the WAS Instance for Database Communications,” on page 37.](#)
3. Completed the first stage of the Content Server installation process, as described in [Chapter 5, “Installing and Configuring Content Server.”](#)

To deploy the Content Server application

1. Log in to the Deployment Manager console:

Note

The default Deployment Manager console port is 9060.

- a. Point your browser to the following URL:
`http://<DM_host>:<DM_console_port>/admin`
- b. Enter your user name and password.
- c. Click **Log in**.

The Deployment Manager (DM) console loads.

2. In the left-hand pane, expand the **Environment** node.



3. Under the **Environment** node, click **Shared Libraries**.

4. In the “Shared Libraries” screen, select the appropriate scope from the drop-down list (typically, **server1**).

5. Click **New** and complete the configuration form as follows:
 - a. In the **Name** field, enter KeyView10
 - b. In the **Classpath** field, enter the path, <cs_install_dir>/bin
 - c. In the **Native Library Path** field, enter the path, <cs_install_dir>/bin
 - d. When you are finished, click **OK**.

The DM console redisplay the “Shared Libraries” screen showing your changes.

6. In the “Messages” box, click **Save**.

Shared Libraries

Messages

Changes have been made to your local configuration. You can:

- **Save** directly to the master configuration.
- **Review** changes before saving or discarding.

An option to synchronize the configuration across multiple nodes after saving can be enabled in [Preferences](#).

The server may need to be restarted for these changes to take effect.

Shared Libraries

Use this page to define a container-wide shared library that can be used by deployed applications.

Scope: Cell=**realhp00Cell01**, Node=**realhp00Node01**, Server=**server1**

Scope specifies the level at which the resource definition is visible. For detailed information on what scope is and how it works, [see the scope settings help](#)

Node=realhp00Node01, Server=server1

Preferences

New Delete

Select	Name	Description
☐	KeyView10	

Total 1


7. In the left-hand pane, expand the **Applications** node.

View: All tasks

- Welcome
- ▢ Guided Activities
- ▢ Servers
- ▢ Applications
 - Enterprise Applications
 - Install New Application
- ▢ Resources
- ▢ Security

8. Under the **Applications** node, click **Install New Application**.
9. In the “Preparing for the application installation” screen, do the following:
- Select **Show me all installation options and parameters**.

b. Select Remote file system and click Browse.

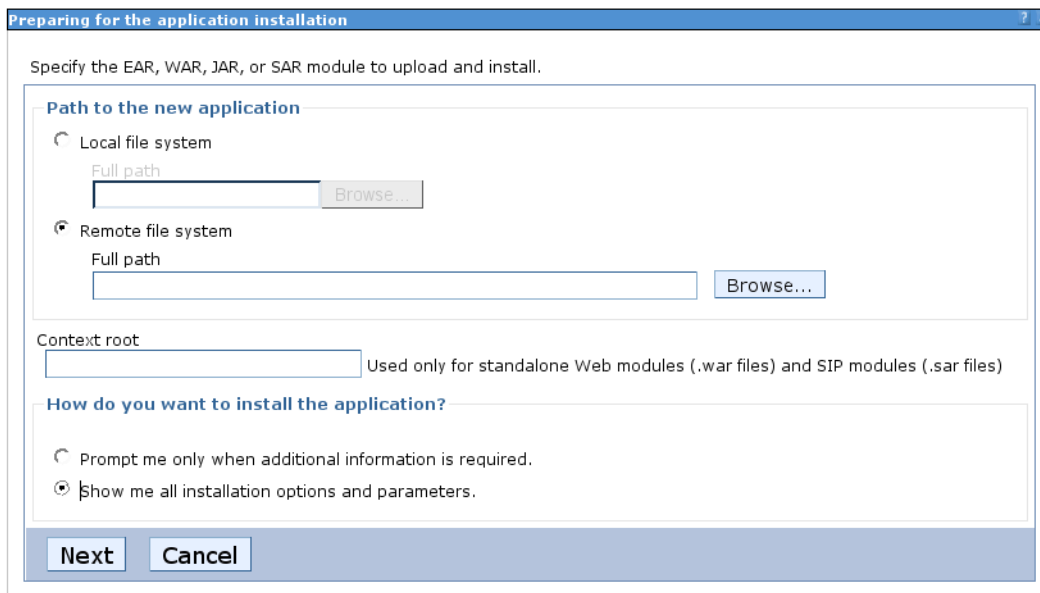

The image shows a dialog box titled "Preparing for the application installation". It contains the following elements:

- A header bar with the title and a help icon.
- Text: "Specify the EAR, WAR, JAR, or SAR module to upload and install."
- A section titled "Path to the new application" with two radio buttons:
 - ☐ Local file system: Includes a "Full path" text field and a "Browse..." button.
 - ☒ Remote file system: Includes a "Full path" text field and a "Browse..." button.
- A "Context root" text field with a note: "Used only for standalone Web modules (.war files) and SIP modules (.sar files)".
- A section titled "How do you want to install the application?" with two radio buttons:
 - ☐ Prompt me only when additional information is required.
 - ☒ Show me all installation options and parameters.
- At the bottom, "Next" and "Cancel" buttons.

10. In the "Browse Remote Filesystems" screen, do the following:
 - a. Select the application server node on which you are deploying the CS application.
 - b. Browse to the `<cs_install_dir>/ominstallinfo/app` directory.
 - c. Select the `ContentServer.ear` file.
 - d. Click **OK**.

The DM console redisplay the "Preparing for the application installation" screen showing the path to the CS application file you selected.
 - e. Click **Next**.
11. In the "Choose to generate mappings and bindings" screen, click **Next**.
12. In the "Application Security Warnings" screen, click **Continue**.

13. In the “Select installation options” screen, select **Precompile JavaServer Pages files** and click **Next**.

→ **Step 1: Select installation options**

Step 2: Map modules to servers

Step 3: Provide JSP reloading options for Web modules

Step 4: Map shared libraries

Step 5: Map virtual hosts for Web modules

Step 6: Map context roots for Web modules

Step 7: Summary

Select installation options

Specify the various options that are available to prepare and install your application.

- ☒ Precompile JavaServer Pages files
- Directory to install application:
- ☒ Distribute application
- ☐ Use Binary Configuration
- ☐ Deploy enterprise beans
- Application name:
- ☒ Create MBeans for resources
- ☐ Enable class reloading
- Reload interval in seconds:
- ☐ Deploy Web services
- Validate Input off/warn/fail:
- ☐ Process embedded configuration

File Permission

- Allow all files to be read but not written to
- Allow executables to execute
- Allow HTML and image files to be read by everyone

Application Build ID:

- ☐ Allow dispatching includes to remote resources
- ☐ Allow servicing includes from remote resources

14. In the “Map modules to servers” screen, do the following:

- a. Select the check box for the **cs.war** module.
- b. Select the appropriate server in the **Server** column.
- c. Click **Apply**.

Step 1 Select installation options

→ **Step 2: Map modules to servers**

Step 3 Provide options to compile JSPs

Step 4 Provide JSP reloading options for Web modules

Step 5 Map shared libraries

Step 6 Map virtual hosts for Web modules

Step 7 Map context roots for Web modules

Step 8 Summary

Map modules to servers

Specify targets such as application servers or clusters of application servers where you want to install the modules that are contained in your application. Modules can be installed on the same application server or dispersed among several application servers. Also, specify the Web servers as targets that serve as routers for requests to this application. The plug-in configuration file (plugin-cfg.xml) for each Web server is generated, based on the applications that are routed through.

Clusters and Servers:
 WebSphere:cell=realhp00Cell01,node=realhp00Node01,server=server1

Select	Module	URI	Server
☒	cs.war	cs.war,WEB-INF/web.xml	WebSphere:cell=realhp00Cell01,node=realhp00Node01,server=server1

15. In the “Provide options to compile JSPs” screen, change the value of the **JDK Source Level** field to 15, then click **Next**.

Step 1 Select installation options

Step 2 Map modules to servers

→ **Step 3: Provide options to compile JSPs**

Step 4 Provide JSP reloading options for Web modules

Step 5 Map shared libraries

Step 6 Map virtual hosts for Web modules

Step 7 Map context roots for Web modules

Step 8 Summary

Provide options to compile JSPs

Specify the options for JSP precompiler.

☒ Apply Multiple Mappings

Select	Web module	URI	JSP Class Path	Use Full Package Names	JDK Source Level	Disable JSP Runtime Compilation
☐		cs.war,WEB-INF/web.xml		☒	15	☐

16. In the “Provide JSP reloading options for Web modules” screen, click **Next**.

17. In the “Map shared libraries” screen, do the following:

- a. Select the **cs.war** module check box.
- b. Click **Reference shared libraries**.

Map shared libraries

Specify shared libraries that the application or individual modules reference. These libraries must be defined in the configuration at the appropriate scope.

Reference shared libraries

Select	Application	URI	Shared Libraries
☐	ContentServer	META-INF/application.xml	
Select	Module	URI	Shared Libraries
☒	cs.war	cs.war,WEB-INF/web.xml	

Previous Next Cancel

18. In the “Enterprise Applications” screen, do the following:

- a. In the **Available** field, select the Keyview library path variable you created in [step 5](#) and click the **Add (>>)** button.
- b. Click **OK**.

Enterprise Applications

Map shared libraries to an entire application or per module.

Map libraries to the application or module listed

cs.war

Select the library in the Available list. Move it to the Selected list by clicking >>.

Available: KeyView10 >> Selected:

OK Cancel

The DM console redisplay the “Map shared libraries” screen showing your changes. When that happens, click **Next**.

19. In the “Map virtual hosts for Web modules” screen, click **Next**.

20. In the “Map context roots for Web modules” screen, click **Next**.

Caution

Do not change the context root displayed in this screen. Doing so will render your Content Server installation inoperable.

21. In the “Summary” screen, review the options you have chosen and click **Finish**.

Step 1 Select installation options Step 2 Map modules to servers Step 3 Provide options to compile JSPs Step 4 Provide JSP reloading options for Web modules Step 5 Map shared libraries Step 6 Map virtual hosts for Web modules Step 7 Map context roots for Web modules → Step 8: Summary	Summary Summary of installation options <table border="1"> <thead> <tr> <th>Options</th> <th>Values</th> </tr> </thead> <tbody> <tr> <td>Precompile JavaServer Pages files</td> <td>Yes</td> </tr> <tr> <td>Directory to install application</td> <td></td> </tr> <tr> <td>Distribute application</td> <td>Yes</td> </tr> <tr> <td>Use Binary Configuration</td> <td>No</td> </tr> <tr> <td>Deploy enterprise beans</td> <td>No</td> </tr> <tr> <td>Application name</td> <td>ContentServer</td> </tr> <tr> <td>Create MBeans for resources</td> <td>Yes</td> </tr> <tr> <td>Enable class reloading</td> <td>No</td> </tr> <tr> <td>Reload interval in seconds</td> <td></td> </tr> <tr> <td>Deploy Web services</td> <td>No</td> </tr> <tr> <td>Validate Input off/warn/fail</td> <td>warn</td> </tr> <tr> <td>Process embedded configuration</td> <td>No</td> </tr> <tr> <td>File Permission</td> <td>.*\.*dll=755#.*\.*so=755#.*\.*a=755#.*\.*sl=755</td> </tr> <tr> <td>Application Build ID</td> <td>Unknown</td> </tr> <tr> <td>Allow dispatching includes to remote resources</td> <td>No</td> </tr> <tr> <td>Allow servicing includes from remote resources</td> <td>No</td> </tr> <tr> <td>Cell/Node/Server</td> <td>Click here</td> </tr> </tbody> </table>	Options	Values	Precompile JavaServer Pages files	Yes	Directory to install application		Distribute application	Yes	Use Binary Configuration	No	Deploy enterprise beans	No	Application name	ContentServer	Create MBeans for resources	Yes	Enable class reloading	No	Reload interval in seconds		Deploy Web services	No	Validate Input off/warn/fail	warn	Process embedded configuration	No	File Permission	.*\.*dll=755#.*\.*so=755#.*\.*a=755#.*\.*sl=755	Application Build ID	Unknown	Allow dispatching includes to remote resources	No	Allow servicing includes from remote resources	No	Cell/Node/Server	Click here
Options	Values																																				
Precompile JavaServer Pages files	Yes																																				
Directory to install application																																					
Distribute application	Yes																																				
Use Binary Configuration	No																																				
Deploy enterprise beans	No																																				
Application name	ContentServer																																				
Create MBeans for resources	Yes																																				
Enable class reloading	No																																				
Reload interval in seconds																																					
Deploy Web services	No																																				
Validate Input off/warn/fail	warn																																				
Process embedded configuration	No																																				
File Permission	.*\.*dll=755#.*\.*so=755#.*\.*a=755#.*\.*sl=755																																				
Application Build ID	Unknown																																				
Allow dispatching includes to remote resources	No																																				
Allow servicing includes from remote resources	No																																				
Cell/Node/Server	Click here																																				

Previous Finish Cancel

- 22.** In the “Installing...” screen, wait until all stages complete successfully. When the message, “Application ContentServer has installed successfully” appears, click **Save**.

Installing...

If there are enterprise beans in the application, the EJB deployment process can take several minutes. Please do not save the configuration until the process completes.

Check the SystemOut.log on the Deployment Manager or server where the application is deployed for specific information about the EJB deployment process as it occurs.

ADMA5016: Installation of ContentServer started.

ADMA5067: Resource validation for application ContentServer completed successfully.

ADMA5058: Application and module versions are validated with versions of deployment targets.

ADMA5009: An application archive is extracted at /u01/software/Apps/WebSphere/6.1/AppServer/profiles/Dmgr01/wstemp/wstemp/app_11073a1f083/ext

ADMA5003: The JavaServer Pages (JSP) files in the Web archive (WAR) files cs.war compiled successfully.

ADMA5005: The application ContentServer is configured in the WebSphere Application Server repository.

ADMA5053: The library references for the installed optional package are created.

ADMA5005: The application ContentServer is configured in the WebSphere Application Server repository.

ADMA5001: The application binaries are saved in /u01/software/Apps/WebSphere/6.1/AppServer/profiles/Dmgr01/wstemp/0/worksapce/cells/realhp00Cell01/applications/ContentServer.ear/ContentServer.ear

ADMA5005: The application ContentServer is configured in the WebSphere Application Server repository.

SECJ0400: Successfully updated the application ContentServer with the appContextIDForSecurity information.

ADMA5011: The cleanup of the temp directory for application ContentServer is complete.

ADMA5013: Application ContentServer installed successfully.

Application ContentServer installed successfully.

To start the application, first save changes to the master configuration.


Changes have been made to your local configuration. You can:

- **Save** directly to the master configuration.
- **Review** changes before saving or discarding.

To work with installed applications, click the “Manage Applications” button.

[Manage Applications](#)

- 23.** In the “Enterprise Applications” screen, click the **ContentServer** application.

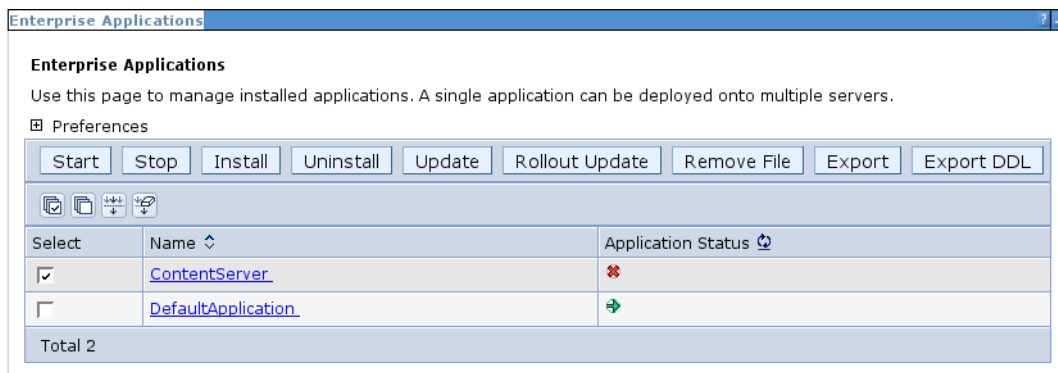

24. In the screen that follows, click **Class loading and update detection**.

Enterprise Applications > **ContentServer**

Use this page to configure an enterprise application. Click the links to access pages for further configuring of the application or its modules.

Configuration

General Properties

* Name
ContentServer

Application reference validation
Issue warnings

Detail Properties

- Target specific application status
- Startup behavior
- Application binaries
- Class loading and update detection**
- Remote request dispatcher properties
- View Deployment Descriptor
- Last participant support extension

Modules

- Manage Modules

Web Module Properties

- Session management
- Context Root For Web Modules
- JSP reload options for web modules
- Virtual hosts

References

- Shared library references

Apply OK Reset Cancel

25. In the screen that appears, do the following:

- In the **Polling interval for updated files** field, enter 30.
- In the “Class load order” section, select **Classes loaded with application class loader first**.
- In the “WAR class loader policy” section, select **Single class loader for application**.
- Click **OK**.

Enterprise Applications > **ContentServer** > **Startup behavior** > **Class loader**

Use this page to configure the reloading of classes when application files are updated.

Configuration

General Properties

☐ Reload classes when application files are updated

Polling interval for updated files
30 Seconds

Class loader order


- ☐ Classes loaded with parent class loader first
- ☒ Classes loaded with application class loader first

WAR class loader policy


- ☐ Class loader for each WAR file in application
- ☒ Single class loader for application

Apply OK Reset Cancel

26. In the “Messages” box, click **Save**.

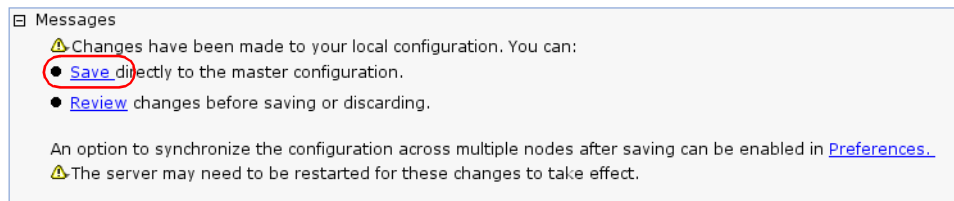

27. In the “Enterprise Applications” screen, select the check box next to the **ContentServer** application and click **Start**.

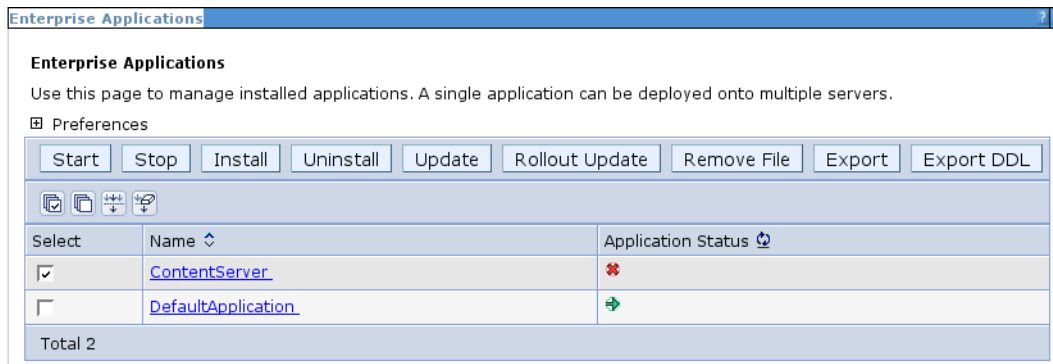

28. If you are creating a Content Server cluster, repeat [steps 3–27](#) of this procedure for each additional member of the cluster.

Restarting the Content Server Application

If you made changes to Content Server property files after the CS application has been deployed (for example, to configure CS as a cluster member), you will need to restart the CS application for the changes to take effect. This section shows you how to restart the CS application using the Deployment Manager console.

To restart the Content Server application

1. Log in to the Deployment Manager console:


Note

The default Deployment Manager console port is 9060.


- a. Point your browser to the following URL:
`http://<DM_host>:<DM_console_port>/admin`
- b. Enter your user name and password.
- c. Click **Log in**.

The Deployment Manager console loads.

2. In the left-hand pane, expand the **Applications** node.



3. Under the **Applications** node, click **Enterprise Applications**.
4. In the “Enterprise Applications” screen, select the check box next to the CS application you want to restart.

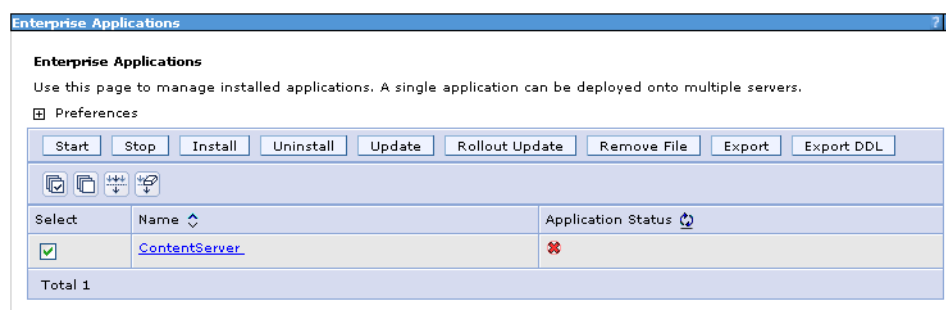

5. Click **Stop**, then click **OK**.
6. Click **Start**, then click **OK**.

Part 3

Web Server

This part explains how to install and configure a supported web server. It also explains how to integrate WAS with a supported web server using the WAS web server plug-in.

This part contains the following chapter:

- [Chapter 4, “Setting Up a Web Server”](#)

Chapter 4

Setting Up a Web Server

This chapter explains how to install IBM HTTP Server, and how to integrate WAS with a local or remote installation of IBM HTTP Server or the Apache 2.0.x web server, using the WebSphere web server plug-in.

This chapter contains the following sections:

- [Installing IBM HTTP Server](#)
- [Installing the Apache 2.0.x Web Server](#)
- [Integrating WAS with a Supported Web Server](#)

Installing IBM HTTP Server

This section explains how to install IBM HTTP Server for integration with WAS.


To install IBM HTTP Server

1. Create the directory where IBM HTTP Server will be installed. Make sure the installer can read from and write to this directory.


Note

Throughout this guide, the directory where IBM HTTP Server is installed is referred to as `<ibm_http_home>`.


2. Decompress the IBM HTTP Server installer archive into a temporary directory.
3. Run the IBM HTTP Server installer:
 - On Windows: `install.exe`
 - On Unix: `install.sh`
4. In the “Welcome” screen, click **Next**.

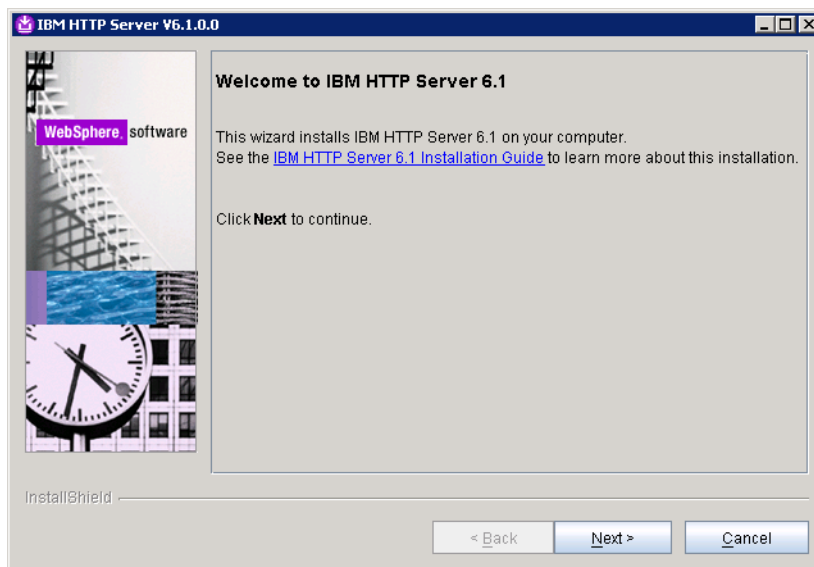


5. In the “Software License Agreement” screen, select **I accept both the IBM and the non-IBM terms** and click **Next**.

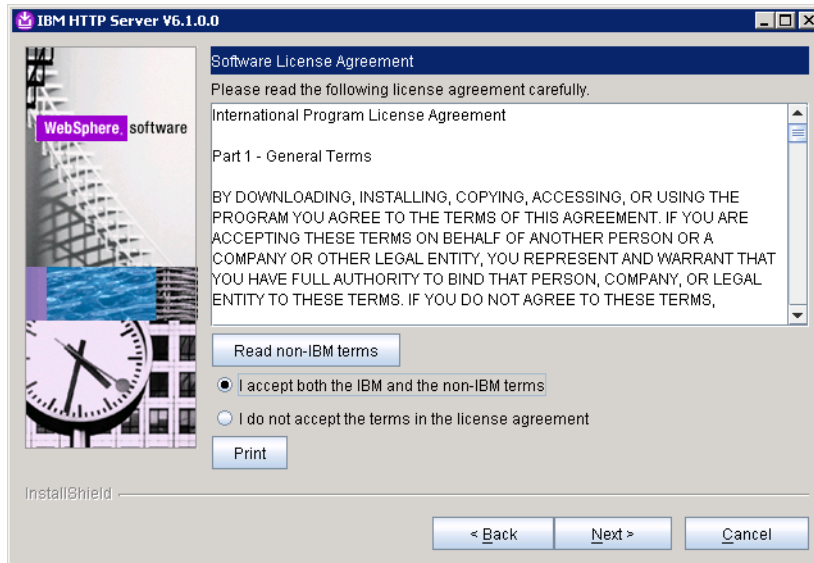


6. In the “System prerequisites check” screen, do one of the following:
 - If the system prerequisites check is successful, click **Next**.
 - If your system does not pass the prerequisites check, stop the installation, correct the problems indicated by the installer, and restart the installation.

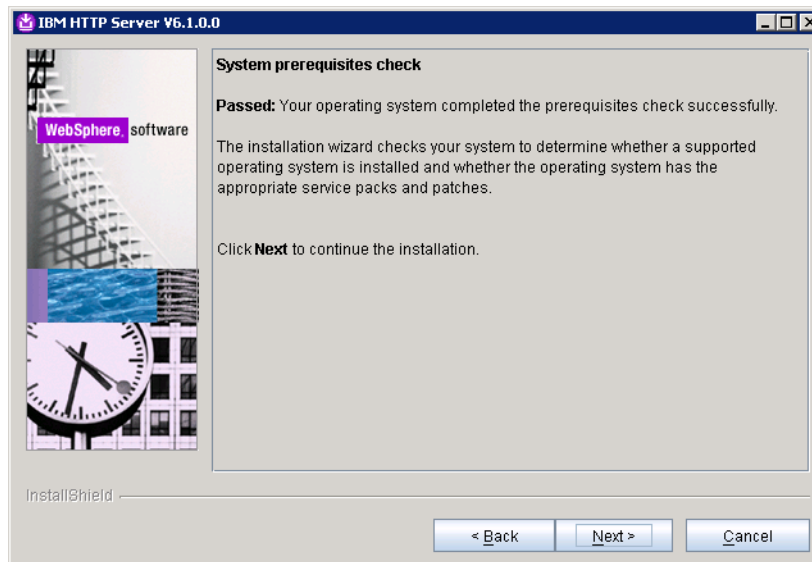

7. In the “Enter the install location” screen, enter the path to the <ibm_http_home> directory you created in [step 1](#), then click **Next**.

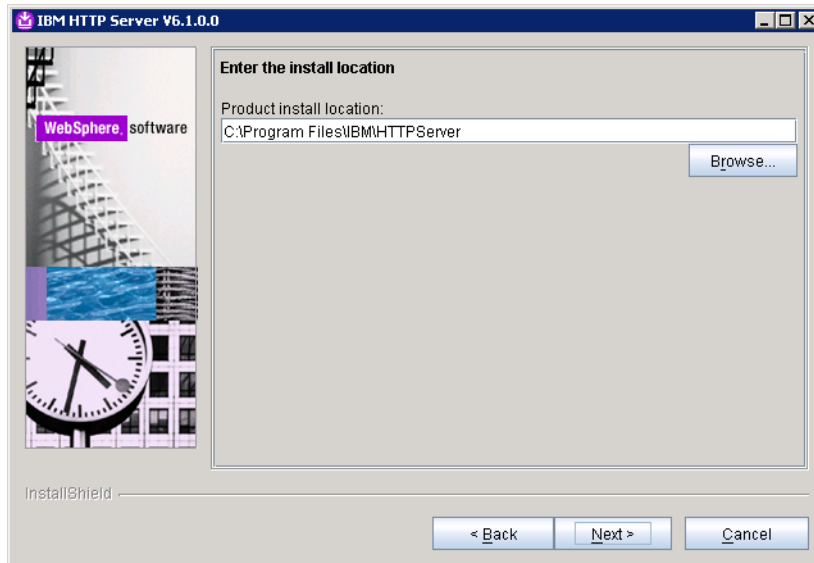

8. In the “Port Values Assignment” screen, do one of the following:
 - If you want to keep the default port numbers, click **Next**.
 - If you want to specify your own port numbers, enter them into the appropriate fields and click **Next**.

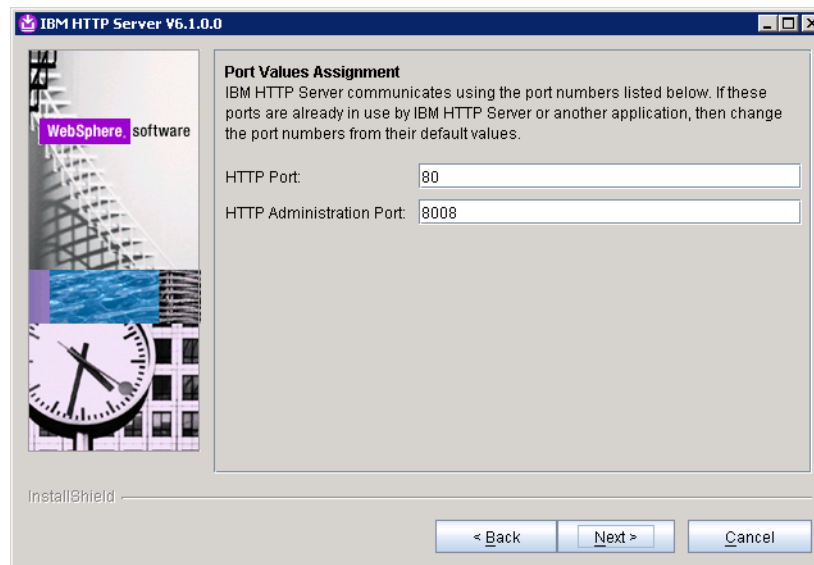


9. If you are installing on Windows, do the following in the “Windows Service Definition” screen:

Note


If you are installing on Unix, skip this step.

- a. Select the **Run the IBM HTTP Server as a Windows Service** and **Run IBM HTTP Administration as a Windows Service** check boxes.
- b. If you want the IBM HTTP Windows services to run under a specific user account, select the **Log on as a specified user account** check box and enter the desired user name and password into the appropriate fields.
- c. Click **Next**.

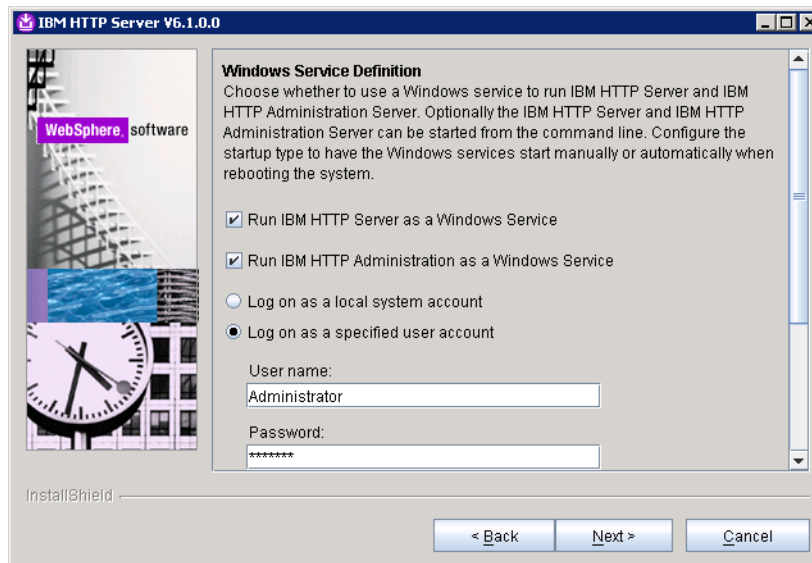


10. In the “HTTP Administration Server Authentication” screen, do the following:
- a. Select the **Create a user ID for IBM HTTP administration server authentication** check box. You will use this user account to log in to the IBM HTTP administration server.
 - b. In the **User ID** and **Password** fields, enter the desired credentials. (Re-enter the password for verification.)

- c. Click **Next**.

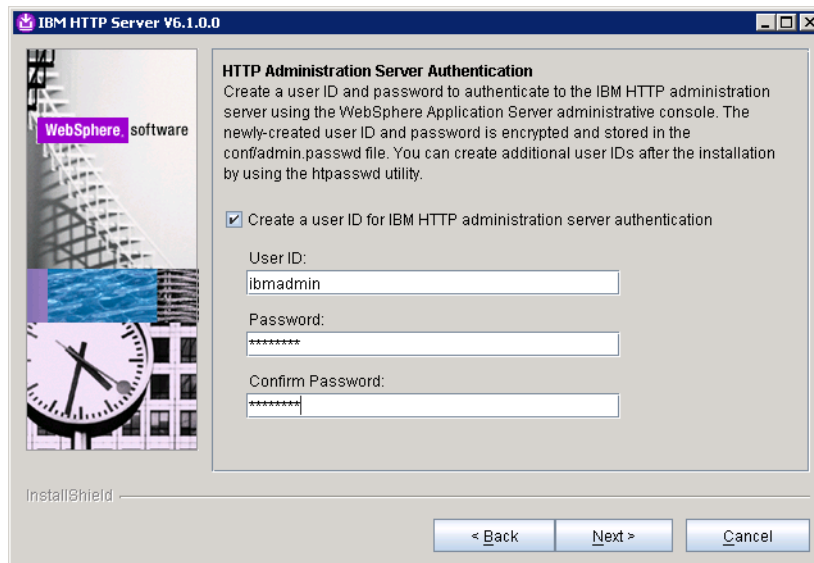


11. In the “IBM HTTP Server Plug-in for WebSphere Application Server” screen, deselect the **Install the IBM HTTP Server Plug-in for WebSphere Application Server** check box and click **Next**.

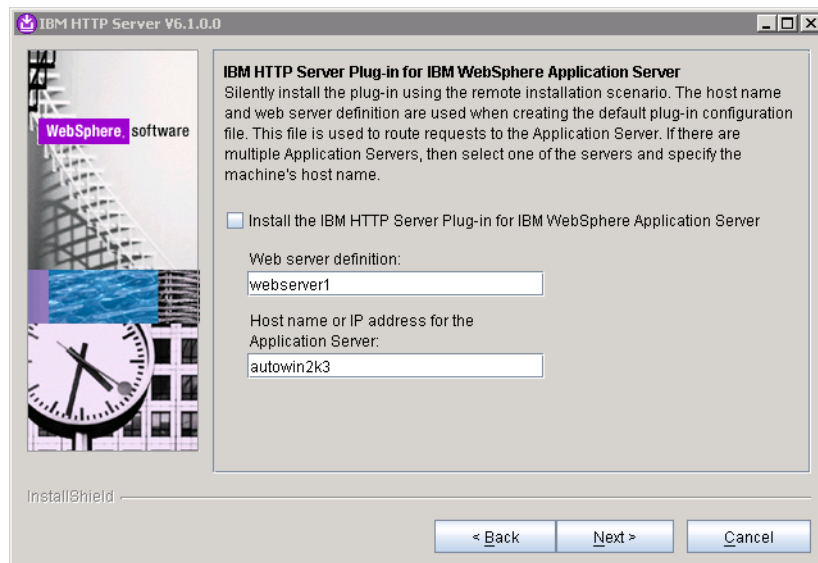


Note

If you leave the **Install the IBM HTTP Server Plug-in for WebSphere Application Server** check box selected, the plug-in will be installed only for the default WAS application server profile. To set up the plug-in on all desired WAS instances, you must use the separate plug-in installer, as described in [“Integrating WAS with a Supported Web Server,” on page 74](#).

12. In the “Installation Summary” screen, review the settings you have chosen, then click **Next**.

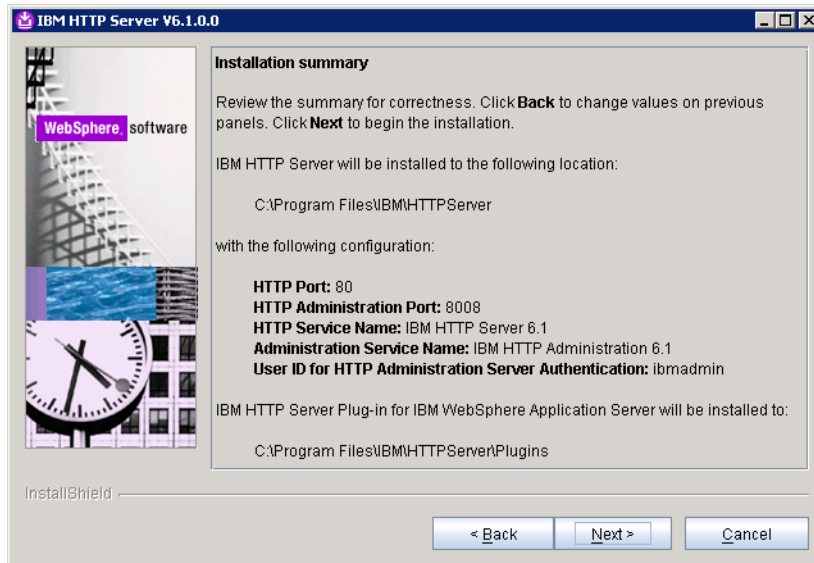

13. When the installation completes successfully, click **Finish**.

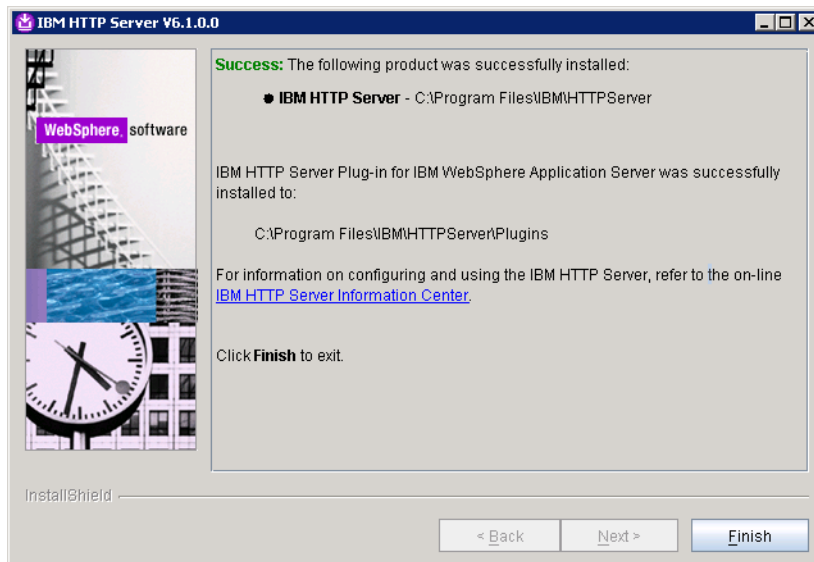

Installing the Apache 2.0.x Web Server

The procedure to set up the Apache 2.0.x web server (beyond the steps necessary to integrate with WAS) is not covered in this guide. For information on setting up the Apache 2.0.x web server, consult one of the following sources:

- If you are installing an Apache web server on Linux or Solaris, consult our guide *Configuring Third-Party Software* for instructions.
- If you are using an operating system other than Linux or Solaris, consult the Apache documentation.

Integrating WAS with a Supported Web Server

This section explains how to integrate WAS with IBM HTTP Server or the Apache 2.0.x web server using the WAS web server plug-in.

Note


Before starting this procedure, make sure of the following:

- You have installed and configured a web server of your choice.
- The web server is not running.


To set up the WAS web server plug-in

1. On the machine on which the web server is installed, decompress the WebSphere Supplements archive into a temporary directory.
2. Run the WAS web server plug-in installer:
 - On Windows:
`<temp_dir>\plugin\install.exe`
 - On Unix:
`<temp_dir>/plugin/install.sh`


3. In the “Welcome” screen, click **Next**.

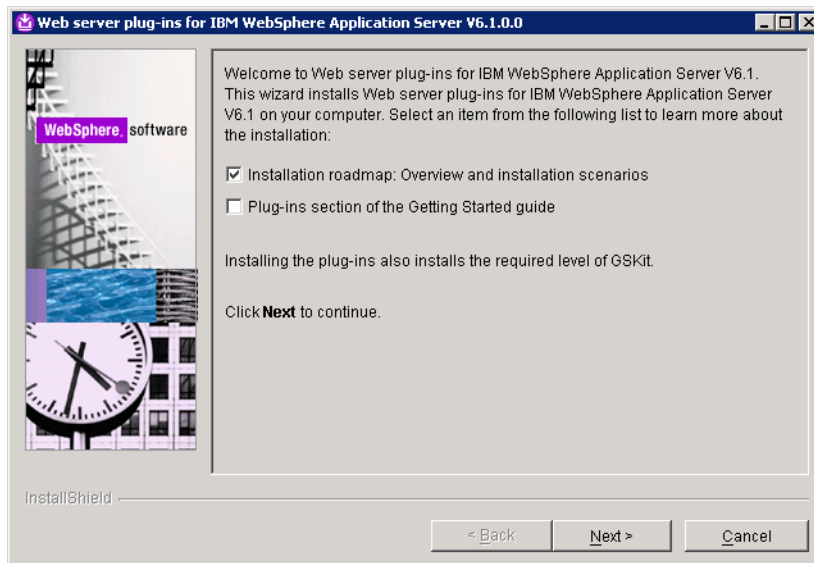


4. In the “Software License Agreement” screen, select **I accept both the IBM and the non-IBM terms**, and click **Next**.

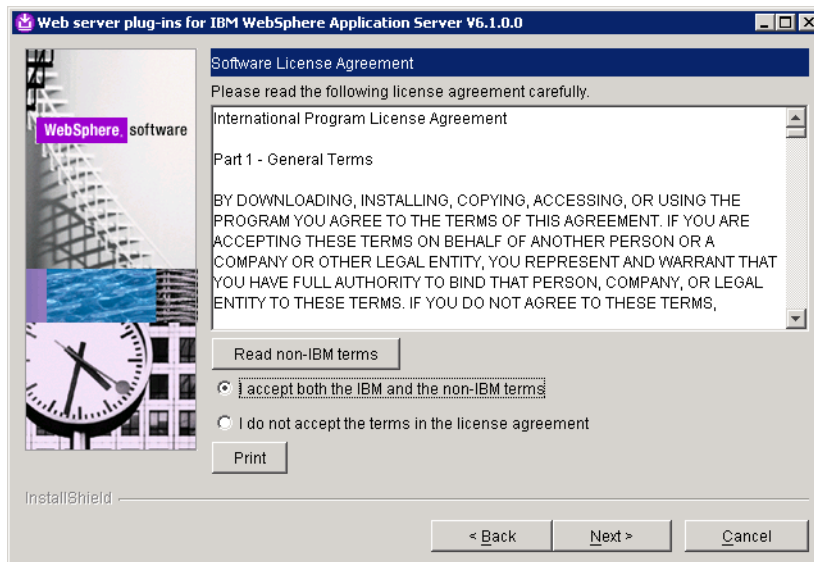


5. In the “System prerequisites check” screen, do one of the following:
 - If the system prerequisites check is successful, click **Next**.
 - If your system does not pass the prerequisites check, stop the installation, correct the problems indicated by the installer, and restart the installation.

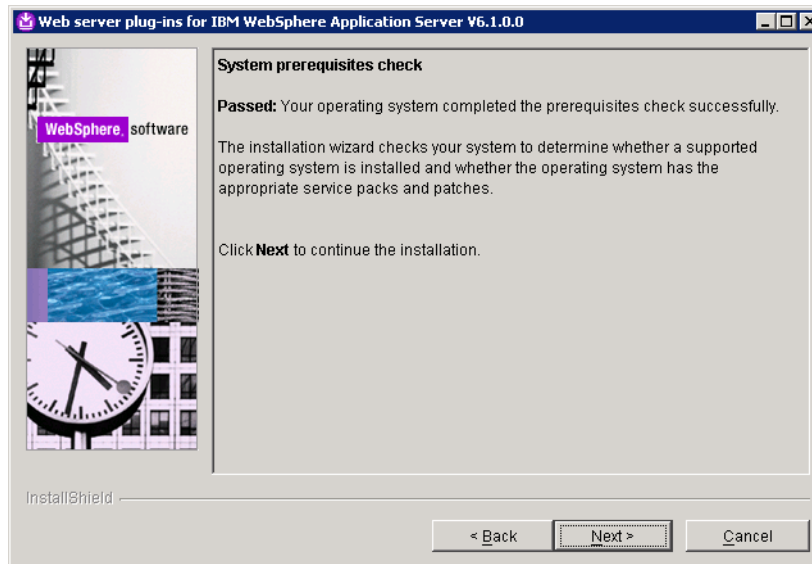


6. In the “Select the web server to configure” screen, select the web server you are using (either **IBM HTTP Server V6 or V6.1** or **Apache Web Server V2**) and click **Next**.

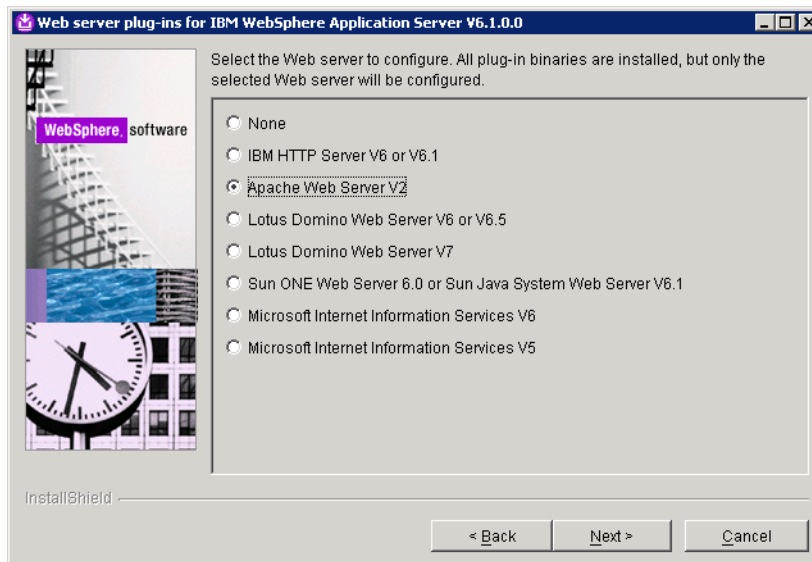


7. In the “Scenario selection” screen, do one of the following:
 - If the web server is installed on the same machine as WAS, select **WebSphere Application Server machine (local)** and click **Next**.
 - If the web server is installed on a different machine, select **Web server machine (remote)** and click **Next**.

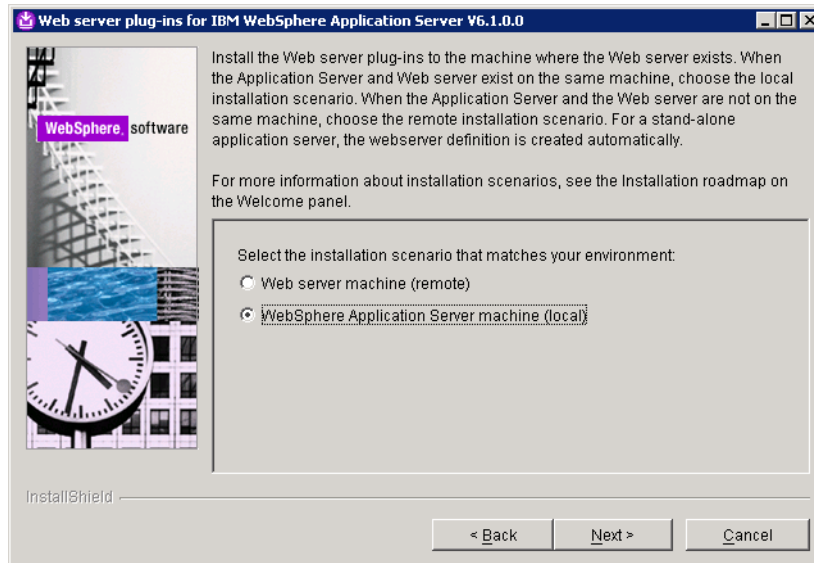

8. In the “Installation directory” screen, browse to the web server’s <plugin_root> directory and click **Next**.

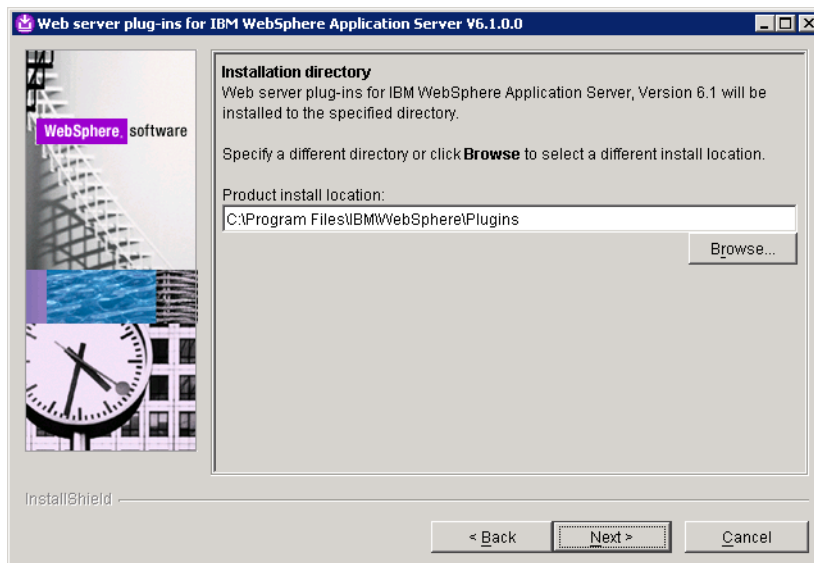


9. If you selected **WebSphere Application Server machine (local)** in [step 7](#), browse to the <WAS_home> directory and click **Next**.

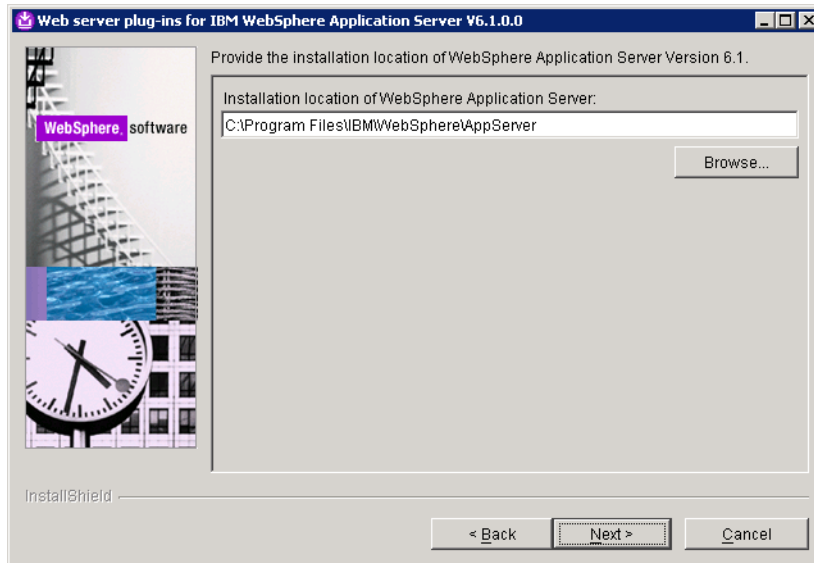

Note

If you selected **Web server machine (remote)** in [step 7](#), skip this step.


10. If you selected **WebSphere Application Server machine (local)** in [step 7](#), select the profile name of the WAS instance you want to integrate with the web server, then click **Next**.

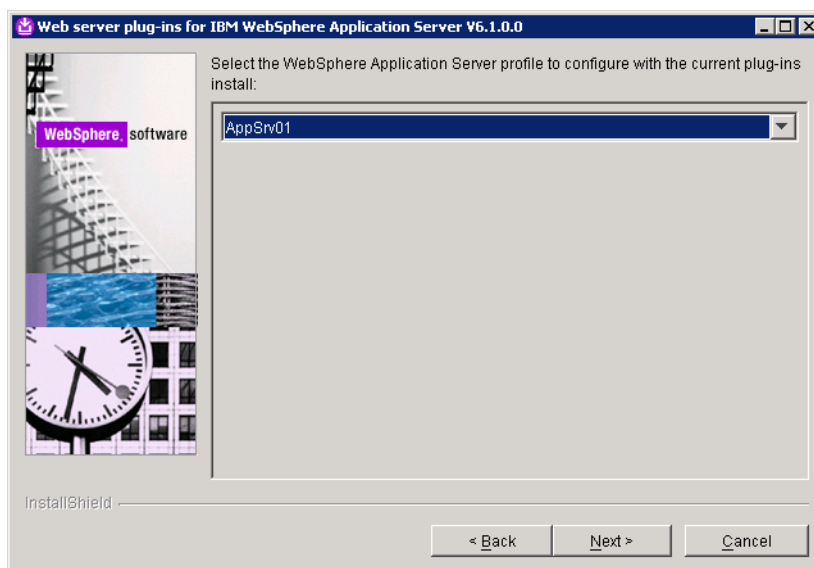


Note

If you selected **Web server machine (remote)** in [step 7](#), skip this step.


11. In the “Web server configuration file and port” screen, do the following:
 - a. Browse to the web server configuration file:
 - If you are using IBM HTTP Server, the location and name of the file are:
`<ibm_http_home>/conf/httpd.conf`
 - If you are using the Apache web server, the location and name of the file are:
`<apache_home>/conf/httpd.conf`
 - b. Specify the port on which your web server is listening for connections.
 - c. Click **Next**.

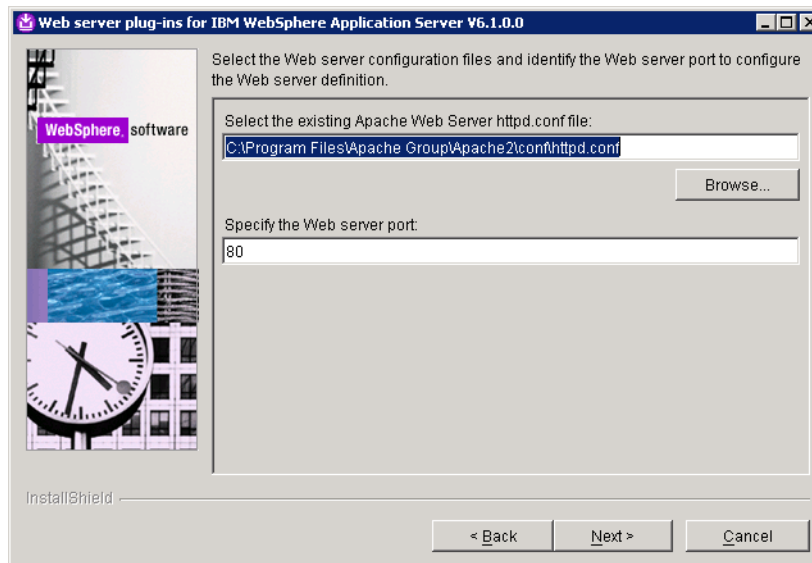

12. In the “Web server definition” screen, enter a unique name for this web server definition. (A web server definition stores the web server configuration data you have entered in the previous steps.) When you are finished, click **Next**.

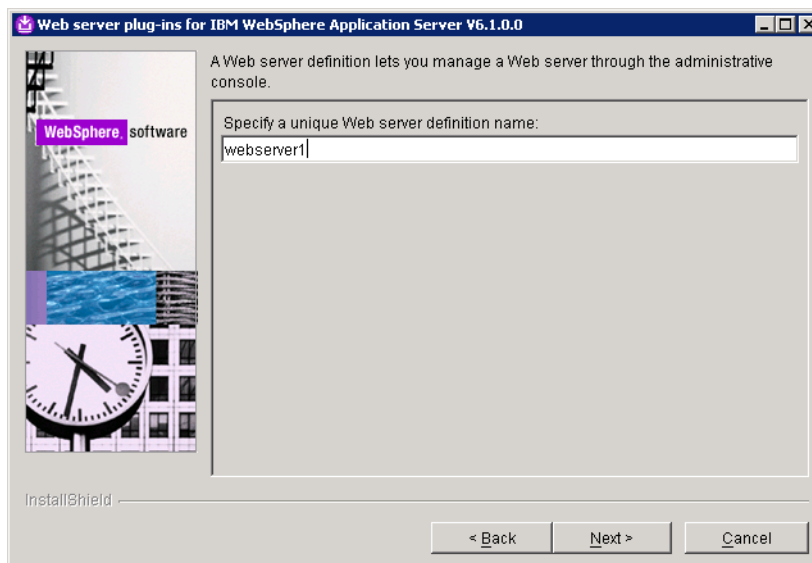

13. In the “Web server plug-in configuration” screen, click **Next**.
14. If you selected **Web server machine (remote)** in [step 7](#), enter the fully qualified host name or IP address of the machine where WAS is installed, then click **Next**.

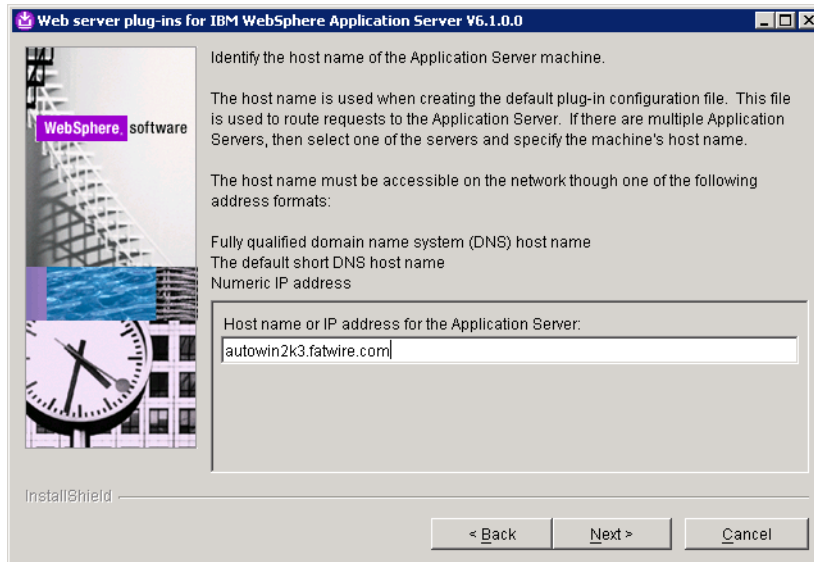

Note

If you selected **WebSphere Application Server machine (local)** in [step 7](#), skip this step.


15. In the “Web server plug-in installation information” screen, click **Next**.
16. In the “Web server plug-in installation summary” screen, click **Next**.

17. If you selected **Web server machine (remote)** in [step 7](#), do the following in the “Manual configuration steps” screen:

Note

If you selected **WebSphere Application Server machine (local)** in [step 7](#), skip this step.

- a. When the installation completes successfully, write down the path to the manual configuration script. You will need this path to locate the script in [step 19](#). (This path will be referred to as <plugin_root> in [step 19](#).)
- b. Click **Next**.

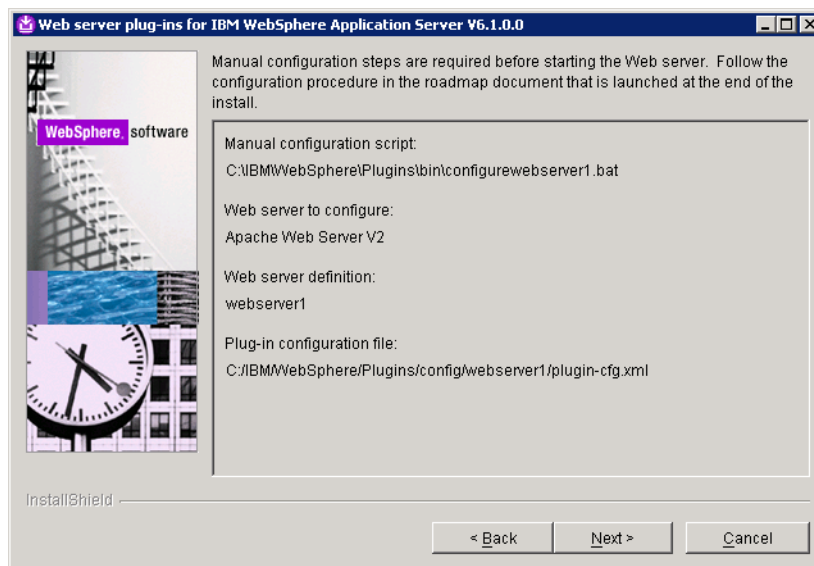

18. In the “Installation completion status” screen, click **Finish**.

19. If you selected **Web server machine (remote)** in [step 7](#), copy the manual configuration script from the `<plugin_root>/bin` directory on web server machine to the `<WAS_home>/bin` directory on the WAS machine.

Note

Before performing this step, note the following:

- If you selected **WebSphere Application Server machine (local)** in [step 7](#), skip this step.
- The manual configuration script is named as follows:
 - On Windows: `configure<web_server_definition_name>.bat`
 - On Unix: `configure<web_server_definition_name>.sh`where `<web_server_definition_name>` is the name you assigned to the web server definition in [step 12](#).
- If the web server and WAS machines are not running the same operating system, you should instead use the manual configuration script located in the `<plugin_root>/bin/crossPlatformScripts` directory on the web server machine.

20. Run the manual configuration script:

- On Windows: `configure<web_server_definition_name>.bat`
- On Unix: `configure<web_server_definition_name>.sh`

Part 4

Content Server

This part shows you how to install Content Server. It contains the following chapter:

- [Chapter 5, “Installing and Configuring Content Server”](#)

Chapter 5

Installing and Configuring Content Server

This chapter guides you through the installation of Content Server on WebSphere Application Server.

This chapter contains the following sections:

- [Installing Content Server](#)
- [Post-Installation Steps](#)

Installing Content Server

After completing [Steps I – IV.1](#) in the “[Installation Quick Reference](#),” on page 7, you install Content Server using the provided installer. The installation process consists of two stages.

In the first stage, the installer gathers necessary configuration information, installs the file structure, and creates the CS application for deployment. At the end of the first stage, the installer displays an “Installation Actions” window describing the steps you must perform before proceeding to the second stage of the installation. These steps include the deployment of the CS application; for instructions, see “[Deploying the Content Server Application](#),” on page 52.

If you are using an Oracle database and require text attributes greater than 2000 characters, you must set the `cc.bigtext` property to `CLOB` after the CS application is deployed. (For instructions, see [step 5](#) in the next section.)

If the first stage fails, the installer allows you to go back and modify your configuration options (except the database type), and retry the installation.

Note

If you need to change the type of database you have specified during the installation, you must delete the installed CS file structure and restart the installation.

In the second stage, the installer populates the database with the tables and data required for Content Server to function. If the second stage fails, the file structure and database tables must be deleted and the installation restarted from the beginning.

Running the Installer

To install Content Server

1. Make sure you have completed [Steps I – IV.1](#) in the “[Installation Quick Reference](#),” on page 7.
2. Extract the Content Server installer archive into a temporary directory.
3. Change to the temporary directory containing the installer files.
4. Execute the installer script:
 - On Windows: `csInstall.bat`
 - On Unix: `csInstall.sh`

The installer provides online help at each screen. Read the online help for detailed explanations of the options that are presented in each screen. If you encounter problems during the installation process, consult the online help for possible causes and solutions.

5. If you are using an Oracle database and require text attributes greater than 2000 characters, you must set the `cc.bigtext` property to `CLOB`. When the installer displays the “Installation Actions” pop-up window, complete step 1 displayed in the window, then do the following:
 - a. Open the Property Editor by clicking the **Property Editor** button.
 - b. In the Property Editor, open the `futuretense.ini` file.

- c. Click the **Database** tab.
 - d. Locate the `cc.bigtext` property and set its value to `CLOB`.
 - e. Save your changes and close the Property Editor.
 - f. Continue on to step 3 displayed in the “Installation Actions” window.
6. When the installation completes successfully, perform the post-installation steps in the next section as required for your installation.

Post-Installation Steps

When the Content Server installation completes successfully, perform the following steps:

- A. [Setting File Permissions \(Unix Only\)](#)
- B. [Verifying the Installation](#)
- C. [Setting Up a Content Server Cluster \(Optional\)](#)
- D. [Setting Up Content Server for Its Business Purpose](#)

A. Setting File Permissions (Unix Only)

If you installed Content Server on Unix, you must grant the “executable” permission to all files in the `<cs_install_dir>/bin` directory. To do so, perform the following steps:

1. Change to the `<cs_install_dir>/bin` directory.
2. Run the following command: `chmod +x *`
3. Restart the CS application.

B. Verifying the Installation

Verify the installation by logging in to Content Server as the administrator.

Logging in to the Advanced Interface

1. Point your browser to the following URL:
`http://<hostname>:<port>/<context>/Xcelerate/LoginPage.html`
Content Server displays the Advanced interface login form.



The image shows the FatWire Content Server 7 login page. It has a blue header with the FatWire logo and 'Content Server 7'. Below the header, there are two input fields: 'User Name:' and 'Password:'. Below these fields are two buttons: 'login' and 'reset'. At the bottom left, there is a circular icon with a person silhouette and two links: 'Forgot your password?' and 'Don't have an account?'. At the bottom right, under the heading 'Installed Products:', there is a list of products: 'Content Server 7.0', 'CS-Direct 7.0', 'CS-Direct Advantage 7.0', 'CS-Engage 7.0', and 'Commerce Connector 7.0'.


2. Enter the following credentials:

- User name: **fwadmin**
- Password: **xceladmin**


3. Click Login.

Depending on whether you installed sample sites, one of the following happens:

- If you did not install any sample sites, you are logged in to the built in Content Server management site. Only system administration functionality is available.

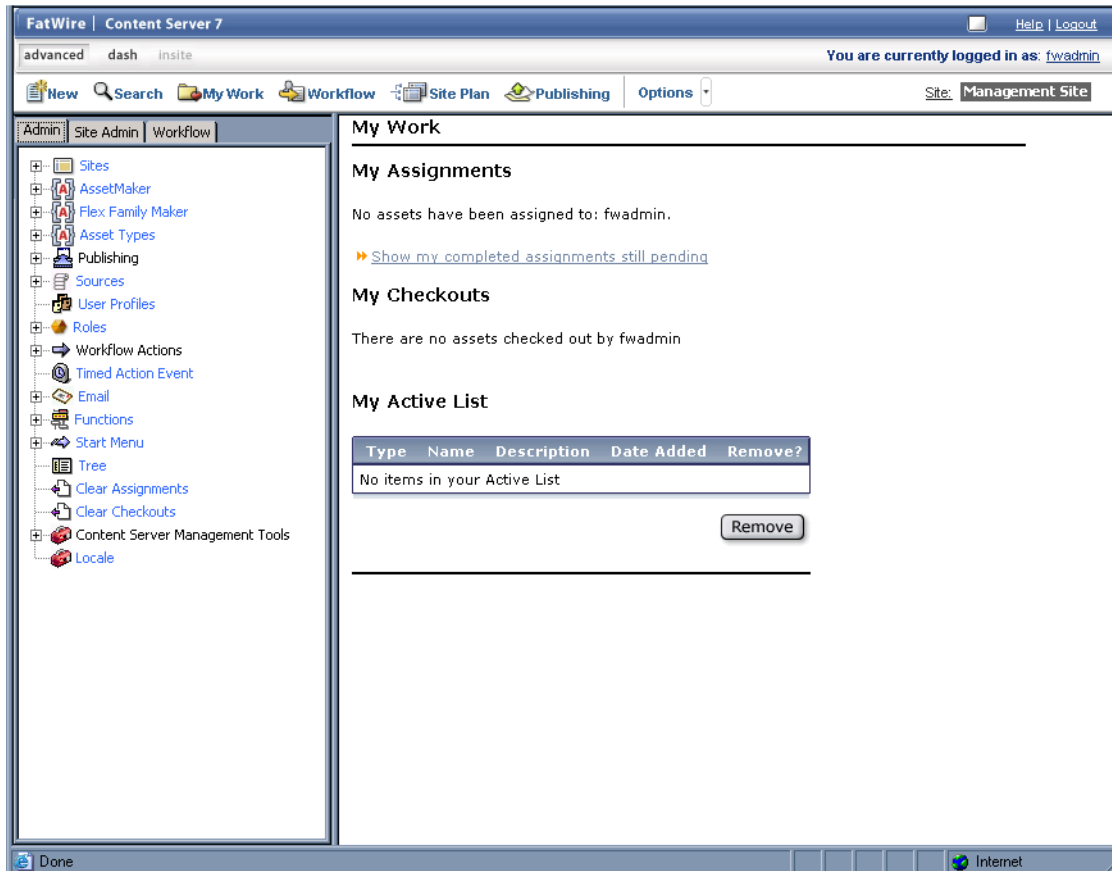

- If you installed one sample site, you are logged in to that site.

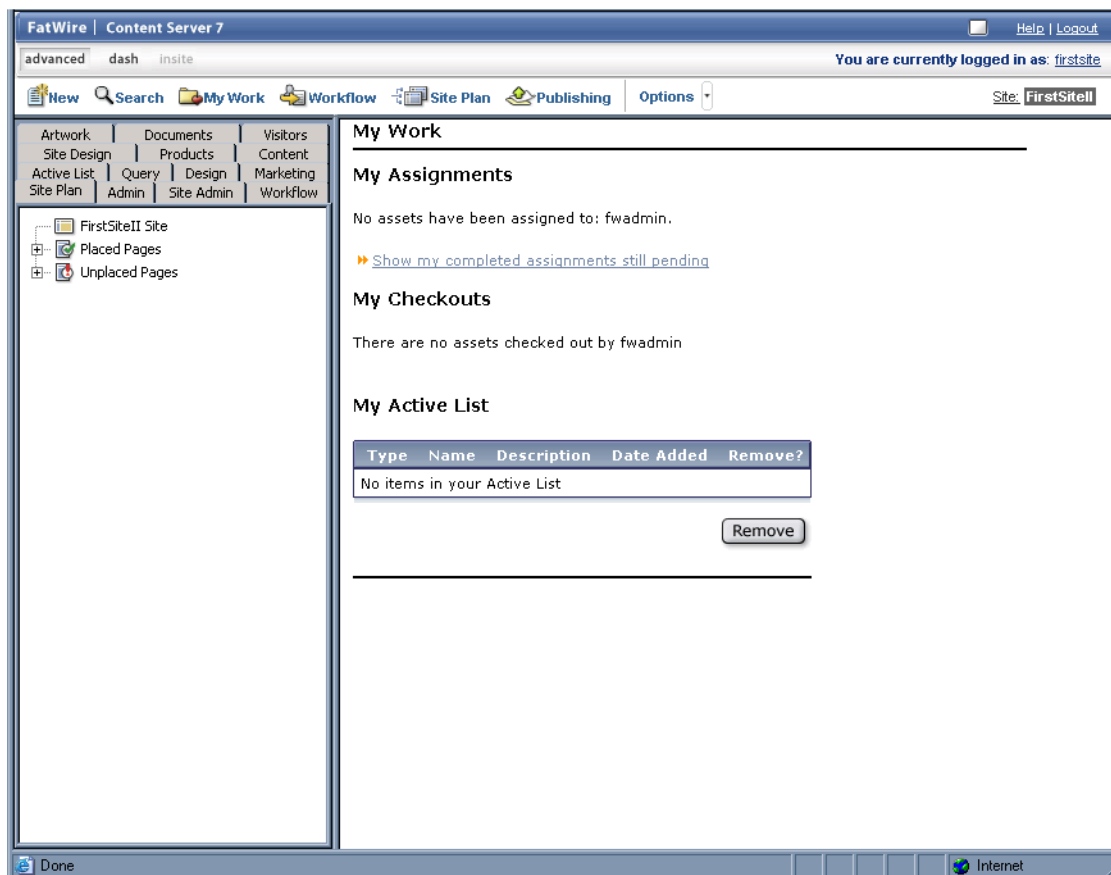

- If you installed more than one sample site, Content Server displays the “Select Site” screen. In such case, select the sample site you wish to log in to.


You have logged in as fwadmin

Select a site that you want to work on:

Site	Description	Assigned Role
BurlingtonFinancial	Burlington Financial	GeneralAdmin, ArtworkEditor, Approver, ContentEditor, WorkflowAdmin, Analyst, Pricer, Marketer, SiteAdmin, Checker, MarketingAuthor, MarketingEditor, Author, Editor, ContentAuthor, Expert, ProductAuthor, ProductEditor, DocumentAuthor, DocumentEditor, Designer, ArtworkAuthor
FirstSiteII	FirstSite Mark II	ArtworkEditor, GeneralAdmin, Approver, ContentEditor, WorkflowAdmin, Analyst, Pricer, Marketer, SiteAdmin, Checker, MarketingAuthor, MarketingEditor, Author, Editor, ContentAuthor, Expert, ProductAuthor, ProductEditor, DocumentAuthor, ArtworkAuthor, Designer, DocumentEditor
GE Lighting	GE Lighting	Designer, SiteAdmin, WorkflowAdmin, GeneralAdmin

[\[Log in again\]](#)

When you select a site, you are logged in to that site.

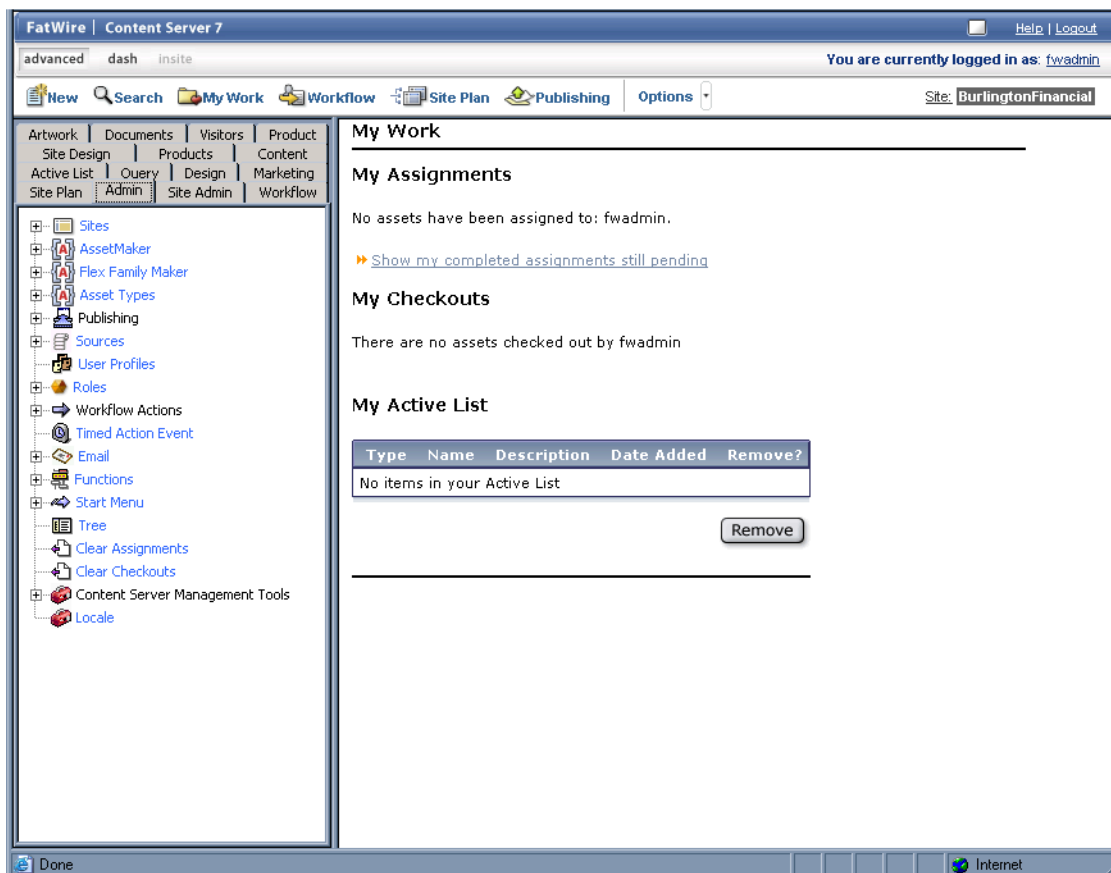

Logging in to the Dashboard Interface

1. Point your browser to the following URL:

`http://<hostname>:<port>/<context>`

Content Server displays the Dashboard interface login page.




2. Enter the following credentials:

- User name: **fwadmin**
- Password: **xceladmin**

3. Click **Login**.

Depending on whether you installed sample sites, one of the following happens:

- If you did not install any sample sites, Content Server displays a message notifying you of that fact. You will not be able to log in to the Dashboard interface until at least one site exists on your system.
- If you installed one sample site, you are logged in to that site.

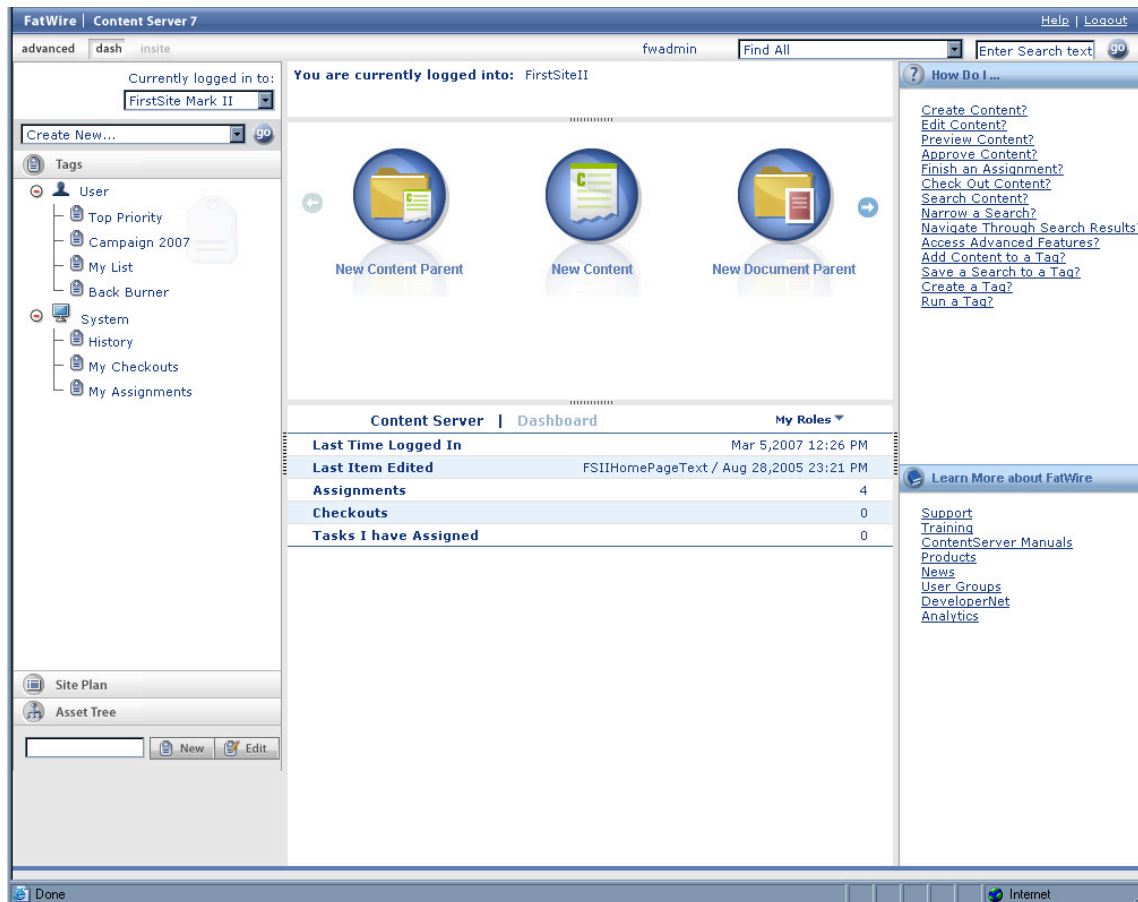


- If you installed more than one sample site, Content Server displays the “Select Site” screen. In such case, select the sample site you wish to log in to.

You are currently logged in as 'fwadmin'
Select a site that you want to work on:

Select	Name	Description	Roles
☒	BurlingtonFinancial	Burlington Financial	ArtworkEditor, GeneralAdmin, Approver, ContentEditor, WorkflowAdmin, Analyst, Pricer, Marketer, SiteAdmin, Checker, MarketingAuthor, MarketingEditor, Author, Editor, ContentAuthor, Expert, ProductAuthor, ProductEditor, DocumentAuthor, DocumentEditor, Designer, ArtworkAuthor
☐	GE Lighting	GE Lighting	Designer, SiteAdmin, WorkflowAdmin, GeneralAdmin
☐	FirstSiteII	FirstSite Mark II	ArtworkEditor, GeneralAdmin, Approver, ContentEditor, WorkflowAdmin, Analyst, Pricer, Marketer, SiteAdmin, Checker, MarketingAuthor, MarketingEditor, Author, Editor, ContentAuthor, Expert, ProductAuthor, ProductEditor, DocumentAuthor, ArtworkAuthor, Designer, DocumentEditor

Select Site

When you select a site, you are logged in to that site.

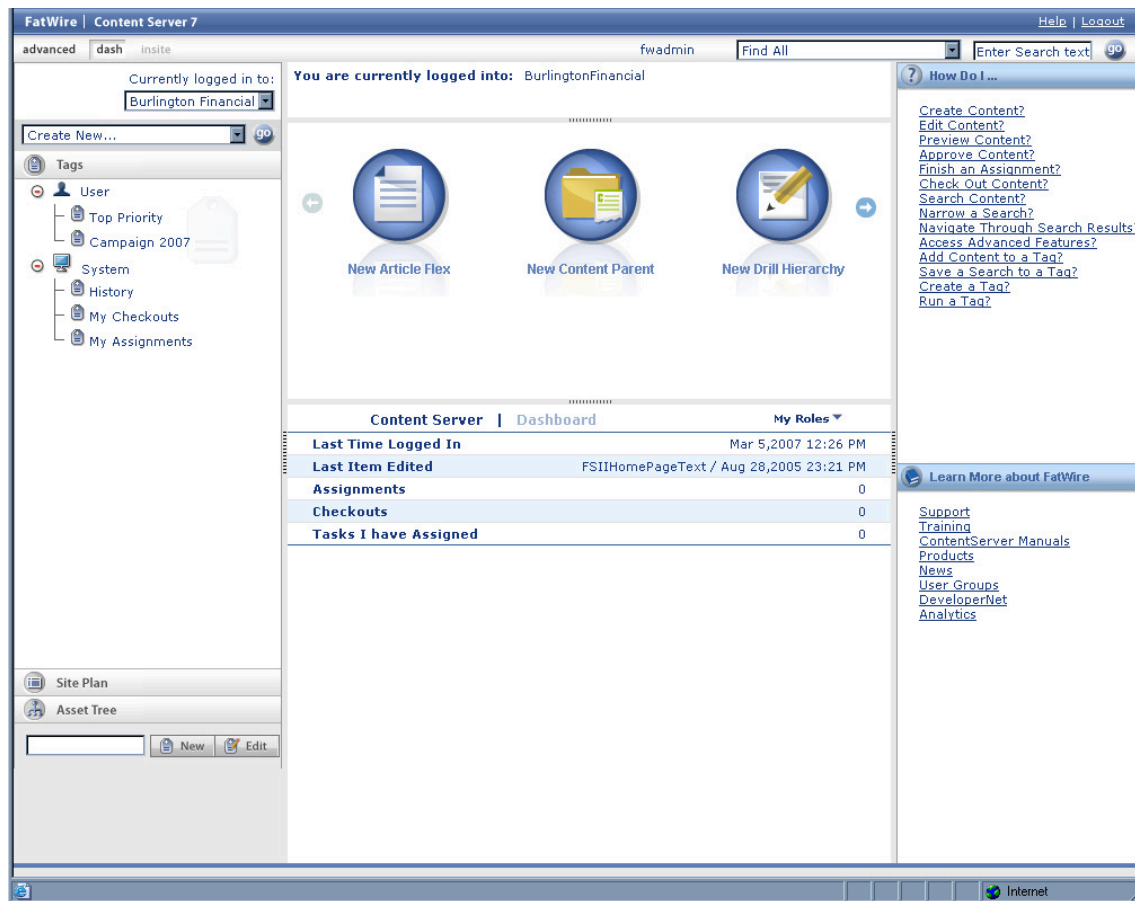

Content Server is now ready for configuration. Follow the steps in the rest of this chapter.

C. Setting Up a Content Server Cluster (Optional)

If you plan to install Content Server in a vertical cluster, follow the steps below. Before you proceed, make sure of the following:

- You are installing a vertical cluster (running WAS instances on the same machine).
- You have created a shared file system directory (referred to in this guide as `<cs_shared_dir>`) that all cluster members can read from and write to. The directory name and path cannot contain spaces.
- You have created a `sync` directory inside the shared file system directory.
- You have created a J2C authentication containing the login information for the database which all Content Server cluster members will be using. For instructions, see [“Creating a J2C Authentication,” on page 37](#).

To set up a Content Server cluster

For each cluster member, do the following:

1. Create a unique application server instance. For instructions, see [“Creating a WAS Instance,” on page 28](#).

2. Create a unique JDBC provider based on the J2C authentication you created for the Content Server database. For instructions, see [“Creating a JDBC Provider,” on page 41.](#)
3. Create a unique JDBC data source based on the J2C authentication you created for the Content Server database, and the JDBC provider you created in [step 2](#) of this procedure. For instructions, see [“Creating a JDBC Data Source,” on page 46.](#)
4. Install Content Server by running the Content Server installer and doing one of the following in the “Clustering” screen:
 - For the primary cluster member, select **Single Server**.
 - For each secondary cluster member, select **Cluster Member**.For more information, see the online help included with the installer.
5. Deploy the CS application, making sure it has a unique name. For instructions, see [“Deploying the Content Server Application,” on page 52.](#)
6. Edit the `<cs_install_dir>/futuretense.ini` file by making the following changes:
 - a. Set `ft.sync` to a value that is the same for all cluster members.
 - b. Set `ft.usedisksync` to `<cs_shared_dir>/sync`.
7. Restart the CS application for the changes to take effect. For instructions, see [“Restarting the Content Server Application,” on page 63.](#)

D. Setting Up Content Server for Its Business Purpose

Once you have completed your Content Server installation, you are ready to configure it for business use. For instructions, see the *Content Server Administrator’s Guide* and the *Content Server Developer’s Guide*. The guides explain how to create and enable a content management environment including the data model, content management sites, site users, publishing functions, and client interfaces.

